

Section B-5: Ducasse & Hettich

Ducasse & Hettich

(Door Tracks)

Section B-5: Ducasse & Hettich

Maverick Hardware

Ducloset Simple


Section B-5: Ducasse & Hettich

CLOSET SYSTEM

TOP SLIDING

DUCLOSET
SIMPLE

DUCASSE
U S A



BYPASS / INLAY
DOOR SYSTEM

MAX DOOR
WEIGHT
66 LBS
30 KG

DOOR
THICKNESS
15 - 30 mm
5/8\"/>


MAX DOOR
WIDTH
NONE

MAX DOOR
HEIGHT
NONE

MIN DOOR
FRAME HEIGHT
>32mm
>1\"/>

DOOR FRAME
MATERIAL
WOOD


DOOR / TRACK
GAP
6.5 mm
1/4\"/>

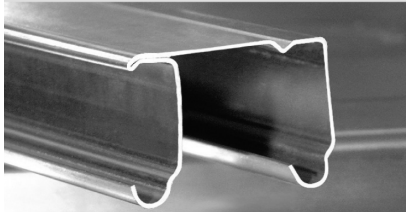

Track U 20 D



Carrier Ducloset Simple

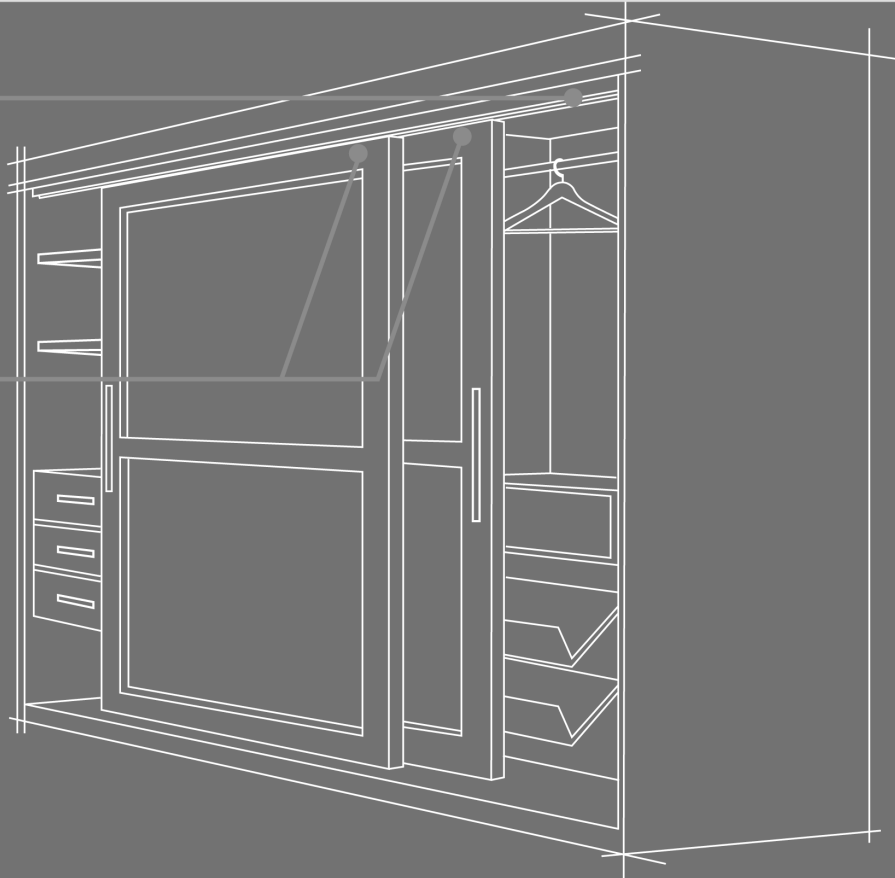

APPLICATIONS AND MAIN FEATURES

Top sliding system for bypass doors installed inlay the opening. Ideal for closet applications.

One box with all you need to install 2 doors, just order the track and you are ready to go.

Galvanized steel double track predrilled for easy and fast installation.

Floor guide adjustable to different door thicknesses.

Bumper between doors to avoid total overlap.

Ball bearing quality rollers.

Ducloset Simple



DUCLOSET SIMPLE



CLOSET SYSTEM

LINEA Mobile

CARRIER TRACK



TRACK U 20 D



PART NUMBER	DESCRIPTION
• 022U20D1	Track U20D Galv, Double 2m (6.5 ft)
• 022U20D2	Track U20D Galv, Double 3m (9.85 ft)
MASTER PACK: 10 units	

Ducloset Simple, carrier set for 2 doors

PART NUMBER: 011203

- A** 4 Carriers Ducloset Simple
- B** 1 Bumper
- C** 1 Floor guide
- D** Screws

MASTER PACK: 10 sets
 MASTER PACK SIZE: 6'25/32 x 7'13/32 x 7'11/64

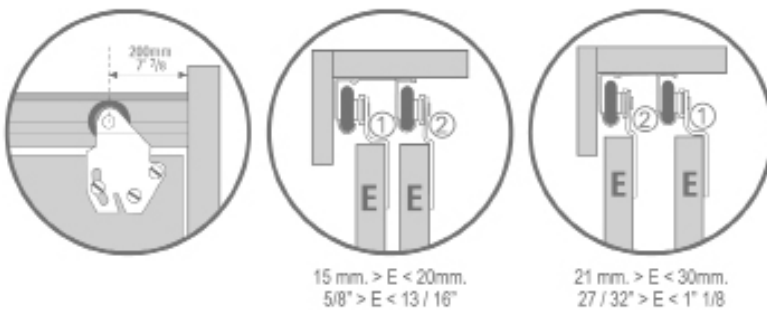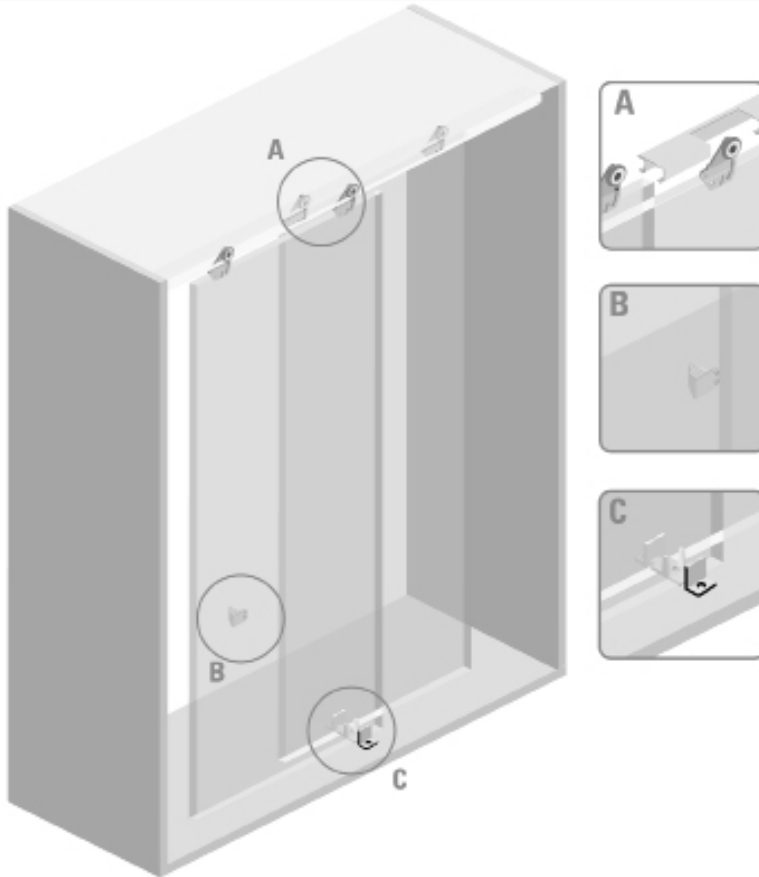

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Ducloset Double

CLOSET SYSTEM

TOP SLIDING

DUCLOSET
DOUBLE

DUCASSE
U S A



BYPASS / INLAY
DOOR SYSTEM

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT

MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
GAP

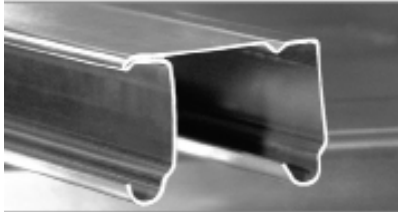

Track U 20 D



Carrier Ducloset Double

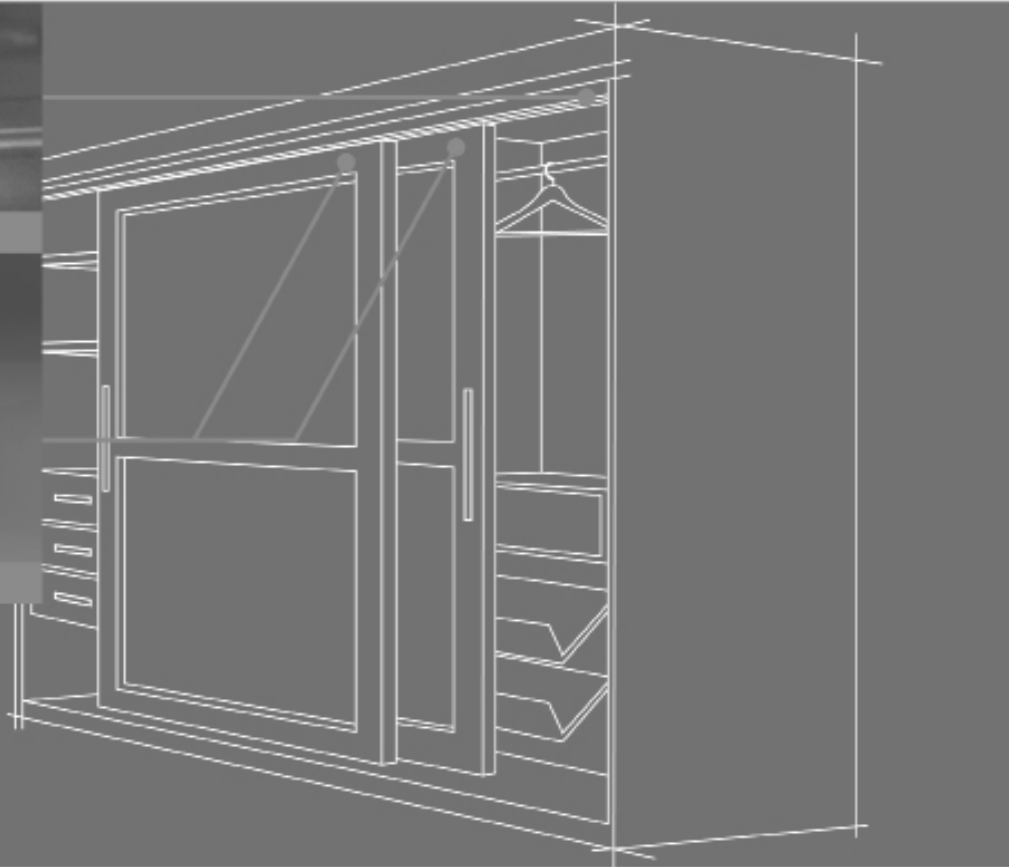

APPLICATIONS AND MAIN FEATURES

Top sliding system for bypass doors installed inlay the opening. Ideal for closet applications.

Door weight capacity up to 99 Lbs.

One box with all you need to install 2 doors, just order the track and you are ready to go.

Galvanized steel double track predrilled for easy and fast installation

Floor guide adjustable to different door thicknesses.

Bumper between doors to avoid total overlap.

Ball bearing quality rollers.

Ducloset Double



DUCLOSET
DOUBLE

CLOSET SYSTEM

LINEA
Mobile



400 HRS
SALINITY
TEST



GRADE 1
ANSI-BHMA *



SYSTEM 32
YES



BALL
BEARING
STANDARD
ROLLER





CARRIER TRACK



TRACK U 20 D

PART NUMBER	DESCRIPTION
• 022U20D1	Track U20D Galv, Double 2m (6.5 ft)
• 022U20D2	Track U20D Galv, Double 3m (9.85 ft)

MASTER PACK: 10 units

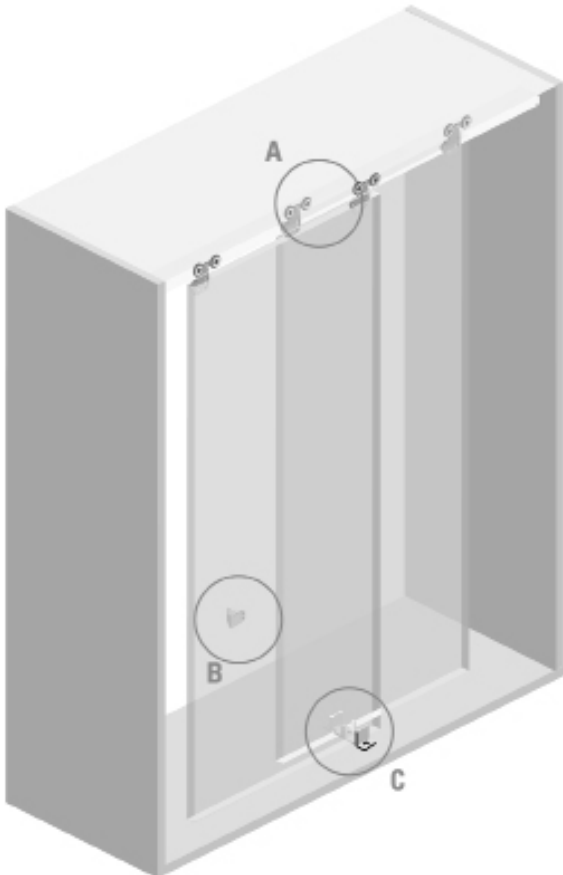



Ducloset Double,
carrier set for 2 doors

PART NUMBER: 011204


- A** 4 Carriers Ducloset Double
- B** 1 Bumper
- C** 1 Floor guide
- D** Screws

MASTER PACK: 10 sets

MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64



15 mm. > E < 20mm.
5/8" > E < 13/16"



21 mm. > E < 30mm.
27/32" > E < 1" 1/8"

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE

(* Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Top Sliding

CLOSET SYSTEM

TOP SLIDING

CA 4585

DUCASSE
U S A



BYPASS / INLAY
DOOR SYSTEM

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT

MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
GAP

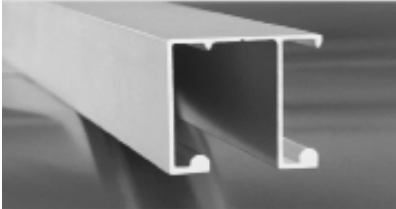

Track U28



Carrier CA 4585

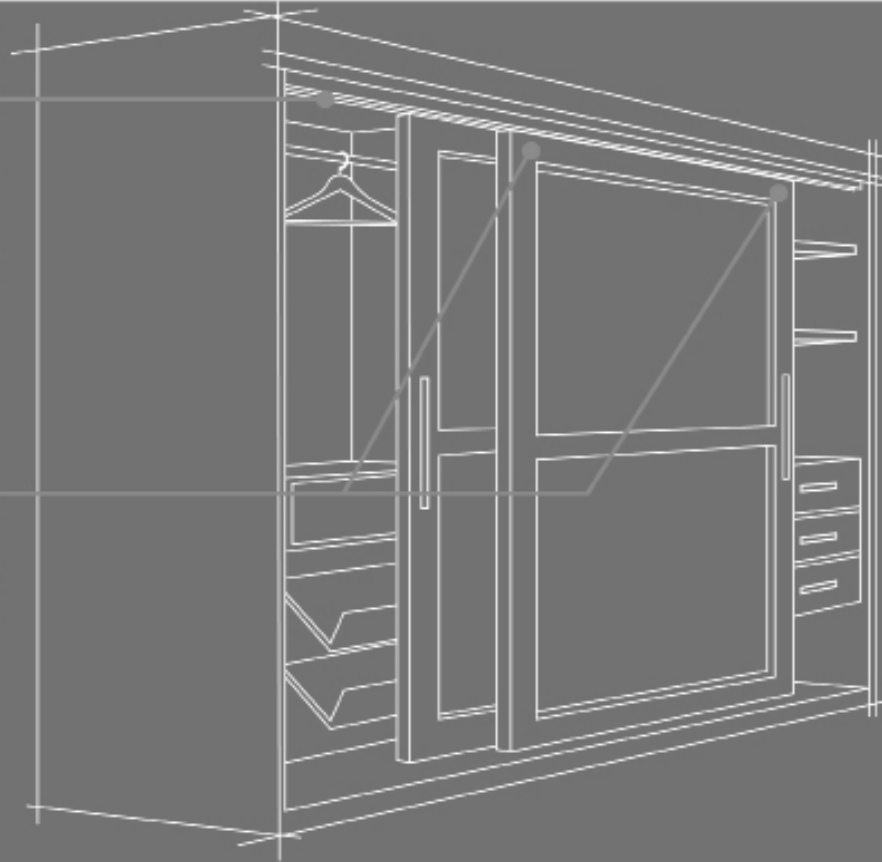

APPLICATIONS AND MAIN FEATURES

Top sliding system for bypass doors installed inlay the opening. Ideal for closet applications.

One box with all you need to install 2 doors, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

Double track for easy and fast installation.

Aluminium track allows a smooth and silent performance.

Track mounted door stoppers with retention device to avoid bumping and clashing of the doors.

Carrier perforations are in system 32, for mechanical installations.

Closet System



CA 4585

CLOSET SYSTEM

LINEA
Mobile



SALINITY TEST



ANSI-BHMA *



SYSTEM 32



ROLLER





CARRIER TRACK



TRACK U 28

PART NUMBER	DESCRIPTION
• 021U281	Track U28 AL Double, 2m (6.5ft)
• 021U282	Track U28 AL Double, 3m (9.85ft)

MASTER PACK: 10 units

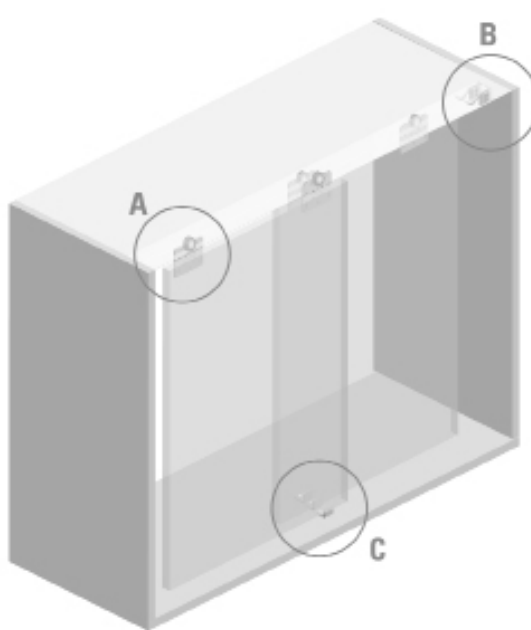


CA 4585,
 carrier set for 2 doors

PART NUMBER: 011205


A	4 Carriers CA4585	
B	2 Right stoppers 2 Left stoppers	
C	3 Plastic guides	
D	8 Clips	
E	1 Allen key	
F	Screws	

MASTER PACK: 10 sets


MASTER PACK SIZE: 6'25/32 x 7'13/32 x 7'11/64



CARRIER
 INSTALLATION



OVERLAY GUIDE
 INSTALLATION



INLAY GUIDE
 INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE

(* Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Top Sliding

CLOSET SYSTEM

TOP SLIDING

CD 50 TOP



BYPASS / OVERLAY DOOR SYSTEM



MAX DOOR WEIGHT



DOOR THICKNESS



MAX DOOR WIDTH



MAX DOOR HEIGHT




MIN DOOR FRAME HEIGHT



DOOR FRAME MATERIAL




DOOR / TRACK GAP




Track 50TAD




Carrier CD 50 Top External door



Carrier CD 50 Top Internal door



Guide G50TAD

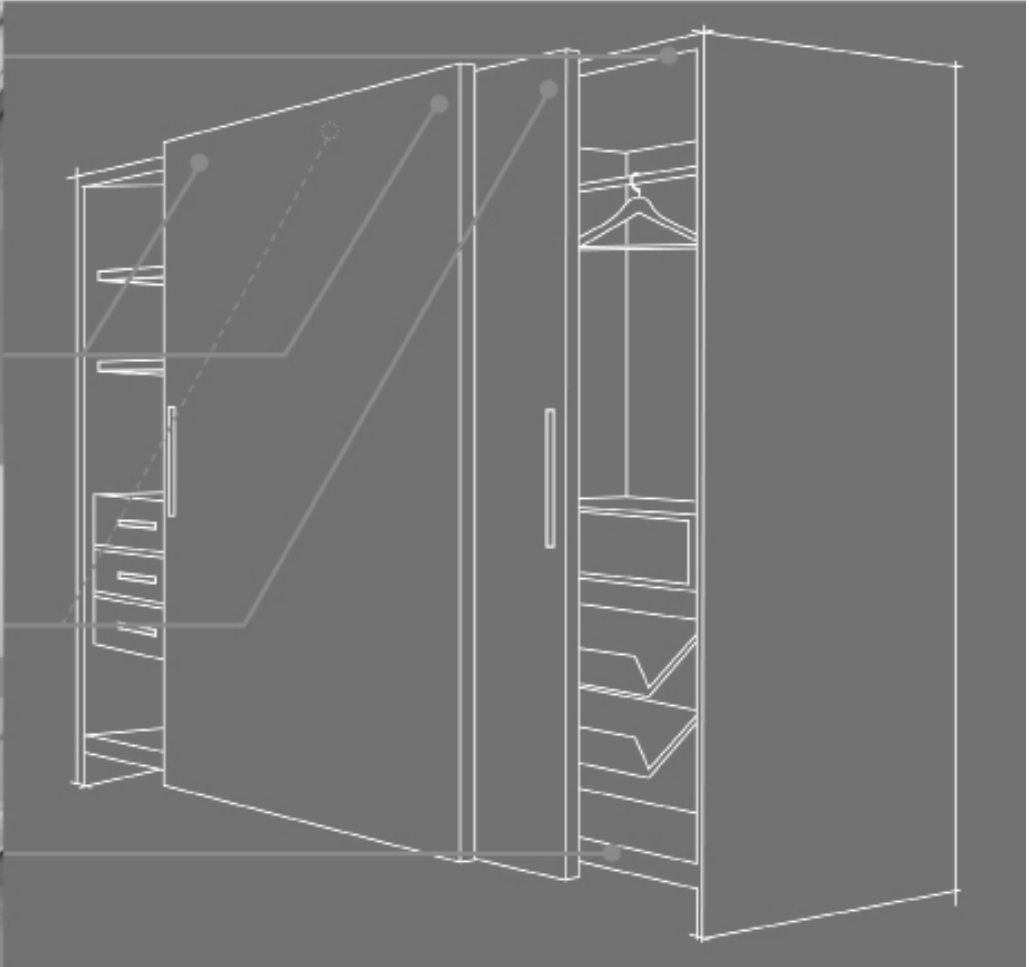

APPLICATIONS AND MAIN FEATURES

Top sliding system for bypass doors installed overlay the opening. Ideal for wardrobe applications.

Ball bearing high quality rollers for a silent and smooth glide.

System allows installation of 2, 3, or 4 doors. Each door system is sold separately. (External, internal)

Track mounted door stoppers with retention device to avoid bumping and clashing of the doors.

Double aluminium track allows a smooth, silent performance and easy installation.

Closet System



CD 50 TOP



CLOSET SYSTEM

LINEA Mobile

CARRIER TRACK



TRACK 50TAD

* DOOR THICKNESS: 18 TO 25 MM (3/4" TO 1")

PART NUMBER	DESCRIPTION
• 02150AD1	Track 50TAD AL Double 2m (6.5 ft)
• 02150AD2	Track 50TAD AL Double 3m (9.85 ft)

MASTER PACK: 4 units



GUIDE TRACK



GUIDE G50TAD

PART NUMBER	DESCRIPTION
• 031D50AD1	Guide G50TAD AL 2m (6.5 ft)
• 031D50AD2	Guide G50TAD AL 3m (9.85 ft)

MASTER PACK: 4 units

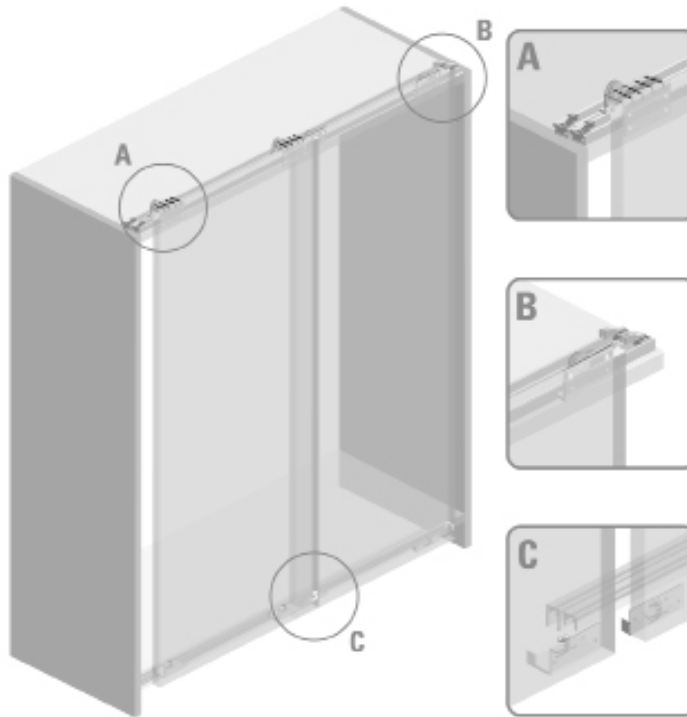

CARRIER TRACK INSTALLATION



GUIDE TRACK INSTALLATION

CD 50 Top, external door, carrier set for 1 door

PART NUMBER: 011201

- A** 1 Upper left carrier
1 Upper right carrier
- B** 2 Top stoppers w/ retention device
- C** 2 Floor guides
- D** 2 Floor bumps
- E** 1 Allen key
- F** Screws

CD 50 Top, internal door, carrier set for 1 door

PART NUMBER: 011202

- G** 1 Upper left carrier
1 Upper right carrier
- H** 2 Top stoppers w/ retention device
- I** 2 Floor guides
- J** 2 Floor bumps
- K** 1 Allen key
- L** Screws

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

sales@ducasseusa.com | www.ducasseusa.com

Maverick Hardware

Floor Sliding

CLOSET SYSTEM

FLOOR SLIDING

CD 40 CX

DUCASSE 
U S A



BYPASS / INLAY
DOOR SYSTEM



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT




DOOR FRAME
MATERIAL




DOOR / TRACK
GAP




Guide Track GD50 AL

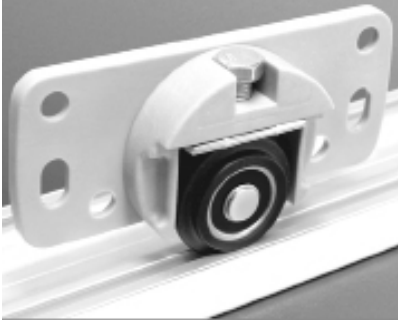

Carrier CD 40 CX

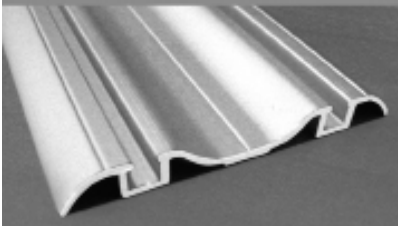

Carrier Track CXD, Double

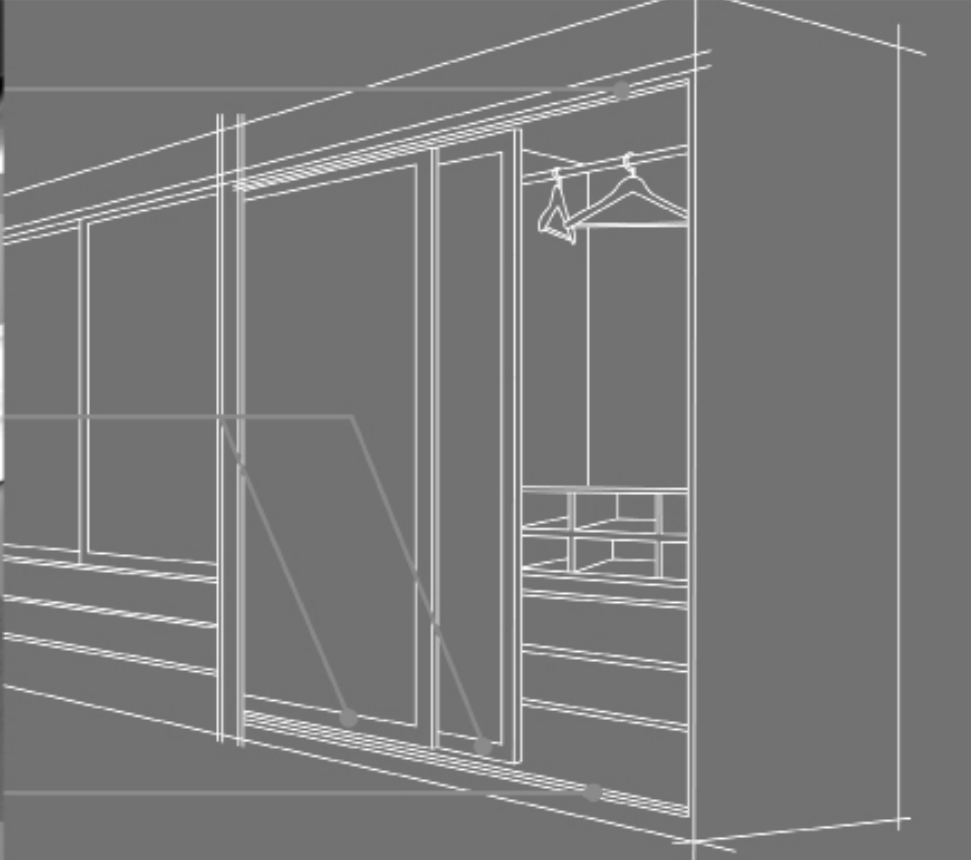

APPLICATIONS AND MAIN FEATURES

Floor sliding system for bypass doors installed inlay the opening. Ideal for closet applications.

One box with all you need to install 2 doors, order the track and guide and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide. Stoppers with retention device.

Double aluminium track allows a smooth, silent performance and easy installation.

Carrier perforations are in system 32, for mechanical installations.

Easy to regulate and adjust.

Closet System



CD 40 CX



CLOSET SYSTEM

LINEA
Mobile

GUIDE TRACK



GUIDE GD 50

PART NUMBER	DESCRIPTION
• 031D501	Guide GD50 AL 2m (6.5 ft)
• 031D502	Guide GD50 AL 3m (9.85 ft)

MASTER PACK: 10 units

CARRIER TRACK OPTIONS



SURFACE MOUNT TRACK CXD

* DOOR THICKNESS: 15 TO 22 MM (5/8" - 7/8")

PART NUMBER	DESCRIPTION
• 021CXD1	Track CXD AL Double 2m (6.5 ft)
• 021CXD2	Track CXD AL Double 3m (9.85 ft)

MASTER PACK: 10 units



SURFACE MOUNT TRACK CX - SINGLE

PART NUMBER	DESCRIPTION
• 021CX1	Track CX AL, Single 2m (6.5 ft)
• 021CX2	Track CX AL, Single 3m (9.85 ft)



MASTER PACK: 10 units




FLUSH MOUNT TRACK CXE

PART NUMBER	DESCRIPTION
• 021CXE1	Track CXE inset AL 2m (6.5 ft)
• 021CXE2	Track CXE inset AL 3m (9.85 ft)


MASTER PACK: 10 units

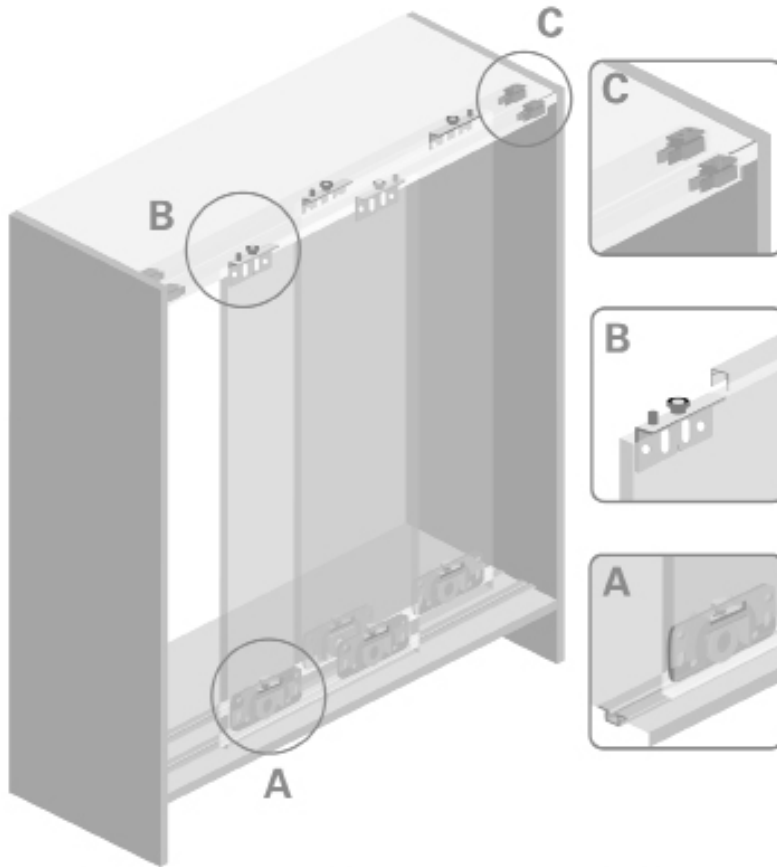

GD 50 GUIDE INSTALLATION



DOUBLE TRACK INSTALLATION



INSET TRACK INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

sales@ducasseusa.com | www.ducasseusa.com

CD 40 CX,
carrier set for 2 doors

PART NUMBER: 011103

- A** 4 carriers CD 40 CX
- B** 2 Upper right guides 2 Upper left guides
- C** 4 stoppers with retention device
- D** 4 Secure Locks
- E** 1 M5 key
- F** Screws

MASTER PACK: 10 sets
 MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64

Maverick Hardware

Floor Sliding

Section B-5: Ducasse & Hettich

CLOSET SYSTEM

FLOOR SLIDING

CD 50 CX

DUCASSE 
U S A



BYPASS / INLAY
DOOR SYSTEM

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT

MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
GAP




Guide Track GD50 AL



Carrier CD 50 CX

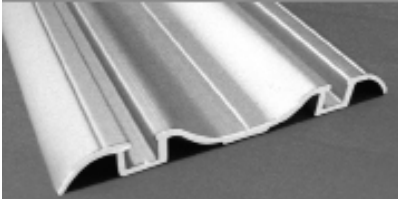

Carrier Track CXD, Double

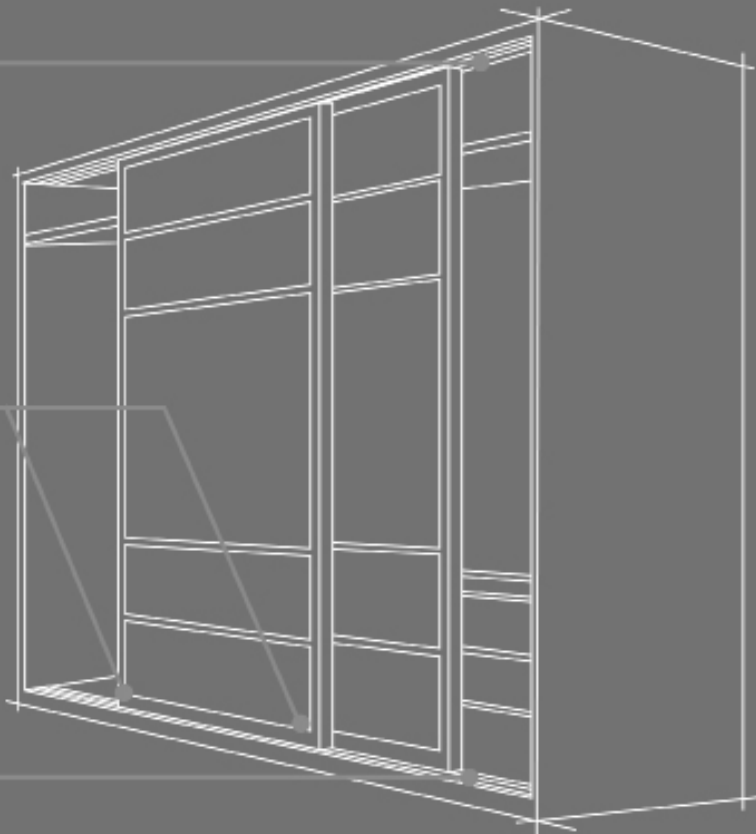

APPLICATIONS AND MAIN FEATURES

Floor sliding system for bypass doors installed inlay the opening. Ideal for closet applications.

One box with all you need to install 2 doors, order the track and guide and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide. Stoppers with retention device.

Double aluminium track allows a smooth, silent performance and easy installation.

Carrier perforations are in system 32, for mechanical installations.


Options of inlay or overlay carrier track gives a wide variety of uses.

Easy to regulate and adjust.

Closet System



CD 50 CX



CLOSET SYSTEM

LINEA
Mobile

GUIDE TRACK



GUIDE GD 50

PART NUMBER	DESCRIPTION
• 031D501	Guide GD50 AL 2m (6.5 ft)
• 031D502	Guide GD50 AL 3m (9.85 ft)

MASTER PACK: 10 units

CARRIER TRACK OPTIONS



SURFACE MOUNT TRACK CXD

*DOOR THICKNESS: 18 TO 22 mm
 3/4" - 15/16"

PART NUMBER	DESCRIPTION
• 021CXD1	Track CXD AL Double 2m (6.5 ft)
• 021CXD2	Track CXD AL Double 3m (9.85 ft)

MASTER PACK: 10 units



SURFACE MOUNT TRACK CX - SINGLE

PART NUMBER	DESCRIPTION
• 021CX1	Track CX AL, Single 2m (6.5 ft)
• 021CX2	Track CX AL, Single 3m (9.85 ft)



MASTER PACK: 10 units




FLUSH MOUNT TRACK CXE

PART NUMBER	DESCRIPTION
• 021CXE1	Track CXE inset AL 2m (6.5 ft)
• 021CXE2	Track CXE inset AL 3m (9.85 ft)


MASTER PACK: 10 units

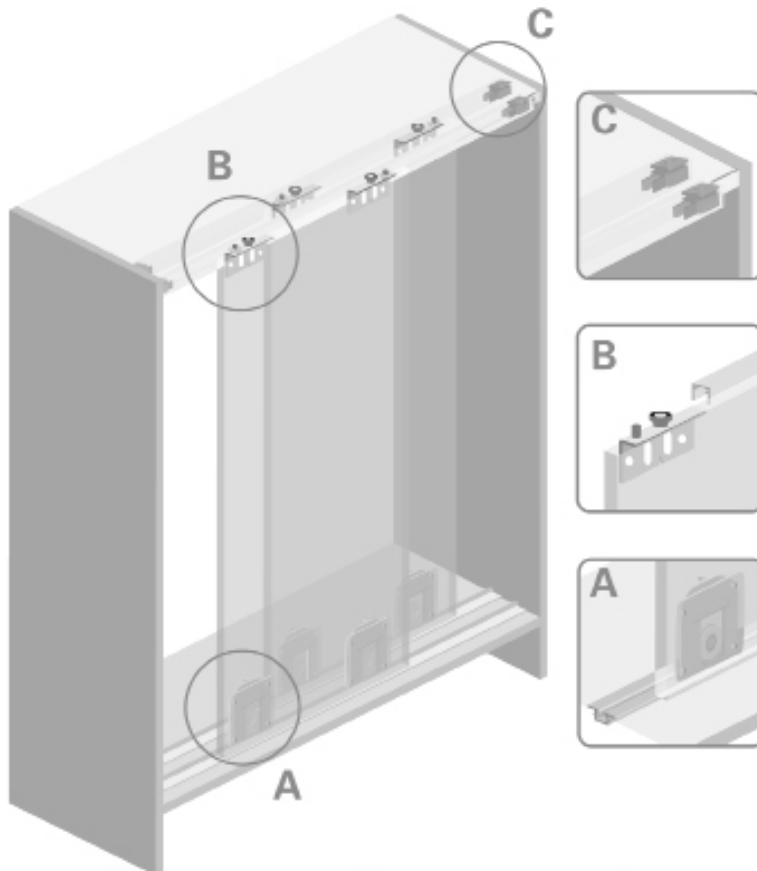

GD 50 GUIDE
 INSTALLATION



DOUBLE TRACK
 INSTALLATION



INSET TRACK
 INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

sales@ducasseeusa.com | www.ducasseeusa.com

CD 50 CX,
 carrier set for 2 doors

PART NUMBER: 011102

- A** 4 carriers CD 50 CX
- B** 2 Upper right guides
 2 Upper left guides
- C** 4 stoppers with
 retention device
- D** 4 Secure Locks
- E** 1 M6 key
- F** Screws

MASTER PACK: 4 sets
 MASTER PACK SIZE: 8*25/32 x 7*13/32 x 7*11/64

Maverick Hardware

Folding System

CLOSET SYSTEM

FOLDING SYSTEM

PL 2550

DUCASSE
U S A



FOLDING / OVERLAY
DOOR SYSTEM

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT

MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
CAP



Track PL 25



Carrier PL2550

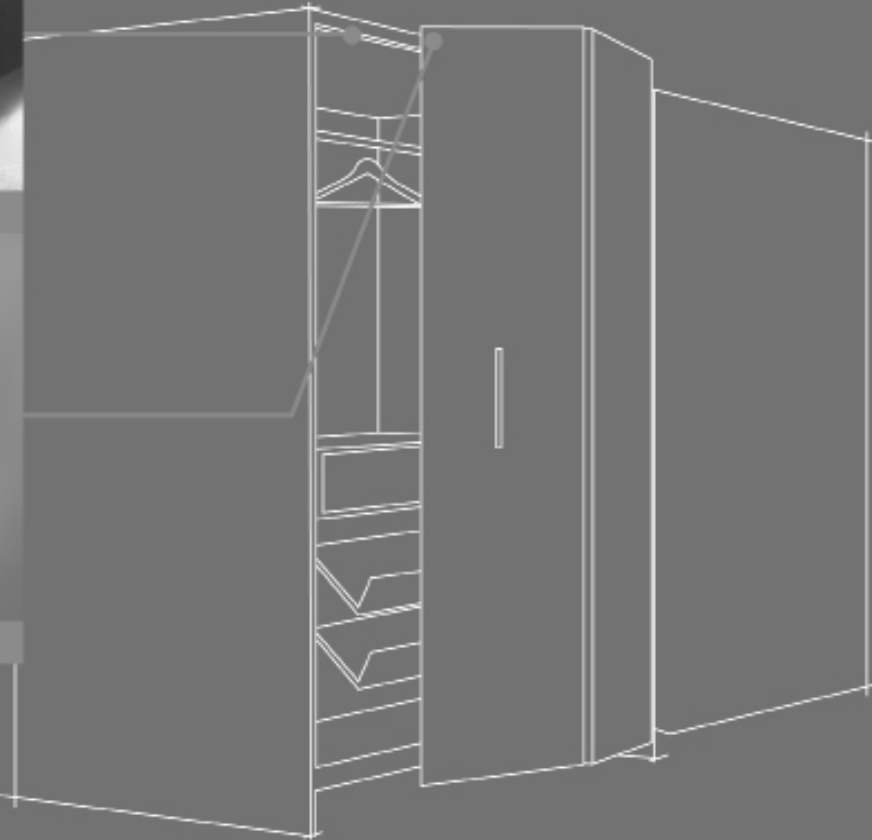

APPLICATIONS AND MAIN FEATURES

Folding system for doors installed overlay the opening. Ideal for closet applications.

One box with all you need to install 2 doors, just order the track and you are ready to go.

Includes Euro hinges to fix the door to the lateral.

Ball bearing high quality rollers for a silent and smooth glide.

Aluminium track allows a smooth, silent performance and easy installation.

Door overlay the closet, hiding the track, with no need for fascia.

The system can be applied to right or left door.

Closet System



PL 2550

CLOSET SYSTEM

LINEA
Mobile



400 HRS
 SALINITY
 TEST



GRADE 1
 ANSI-BHMA *



SYSTEM 32



ROLLER




CARRIER TRACK



TRACK PL25

PART NUMBER	DESCRIPTION
• 021PL251	Track PL25 AL 2m (6.5 ft)
• 021PL252	Track PL25 AL 3m (9.85 ft)

MASTER PACK: 10 units

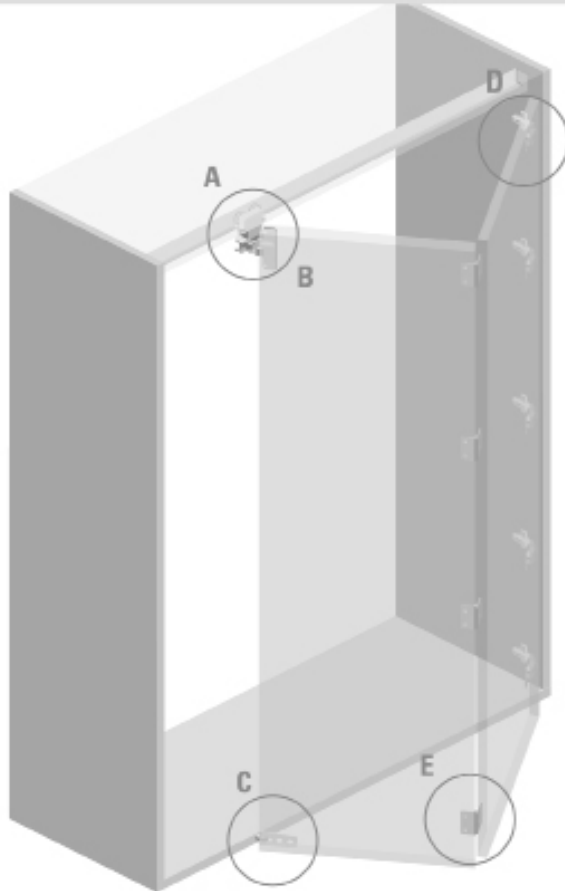


PL2550,
 carrier set for 2 panels

PART NUMBER: 011303

- A** 1 Carrier PL2550
- B** 1 Euro hinge for carrier
- C** 1 Bottom roller guide
- D** 5 Euro hinges
- E** 4 Central hinges to join the panels
- F** Screws

MASTER PACK: 4 sets
 MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64



CARRIER INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Floor Sliding

FURNITURE SYSTEM

FLOOR SLIDING

AL 1535 Glass

DUCASSE 
U S A



BYPASS / INLAY
DOOR SYSTEM

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT

MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
GAP

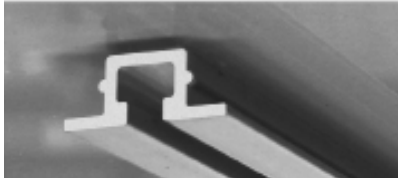


Carrier Track CXE



Carrier AL 1535 Glass

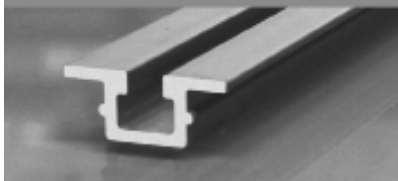

Carrier Track CXE

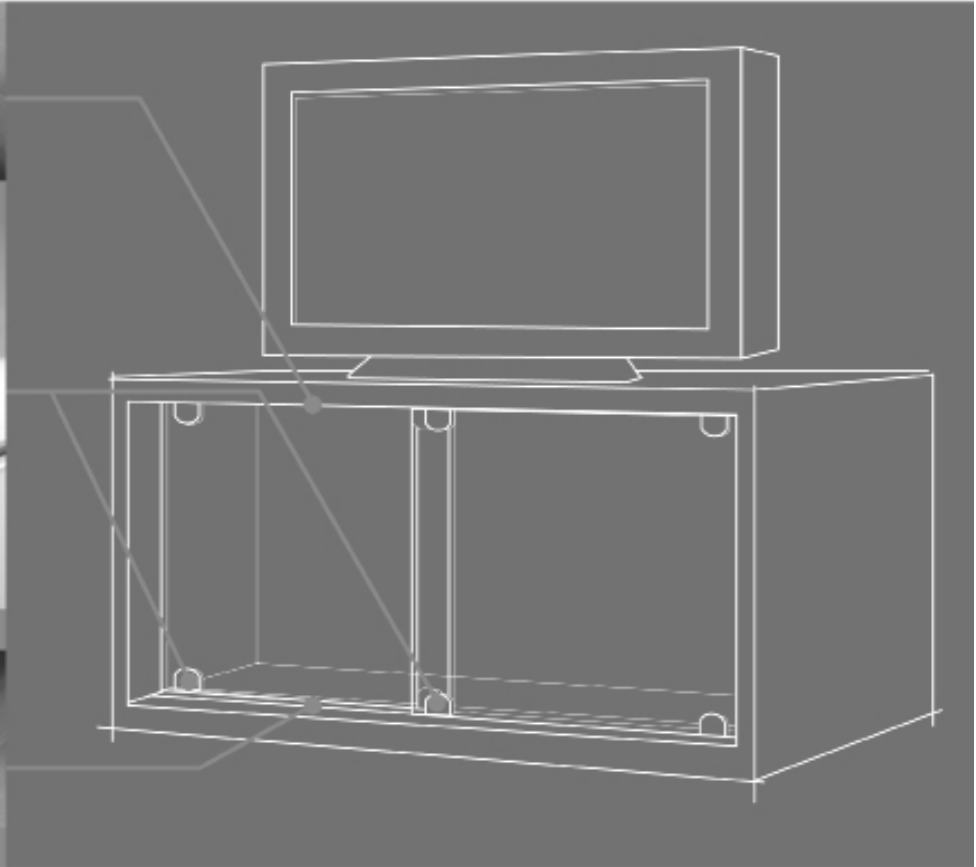

APPLICATIONS AND MAIN FEATURES

Floor sliding system for bypass glass doors installed inlay the opening. Ideal for furniture applications.

One box with all you need to install 2 doors, just order the track and guide and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

Stoppers are installed inside the track.

Furniture System




AL 1535 Glass

FURNITURE SYSTEM

LINEA
 Mobile



SALINITY TEST



SYSTEM 32



ROLLER


CARRIER TRACK



CARRIER TRACK CXE

PART NUMBER	DESCRIPTION
- 021CXE1	Track CXE inset AL 2m (6.5 ft)
- 021CXE2	Track CXE inset AL 3m (9.85 ft)

MASTER PACK: 10 units

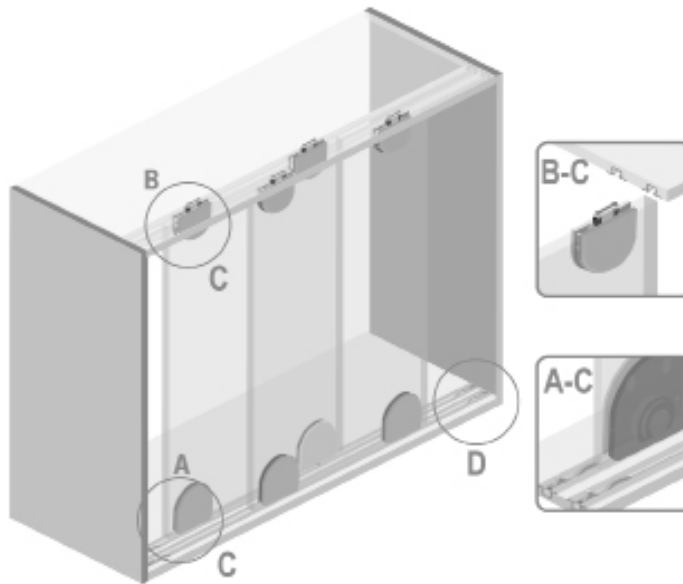


AL 1535 for Glass doors, carrier set for 2 doors

PART NUMBER: 012102


- A** 4 Carriers AL1535
- B** 4 Top guides w/ clip device
- C** 8 Finishing caps
- D** 4 Stoppers with retention device
- E** Screws

MASTER PACK: 10 sets

MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64



CARRIER INSTALLATION



GUIDE INSTALLATION

ALL DIMENSIONS ARE IN MM, CM., KG. USA DIMENSIONS ARE APPROXIMATE

(*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Floor Sliding

Section B-5: Ducasse & Hettich

FURNITURE SYSTEM

FLOOR SLIDING

AL 1535 Wood

DUCASSE
U S A



EYPASS / INLAY
DOOR SYSTEM



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT



DOOR FRAME
MATERIAL



DOOR / TRACK
GAP

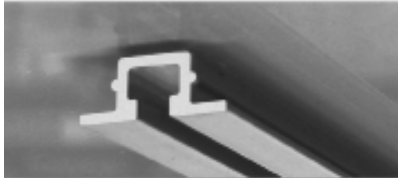


Carrier Track CXE



Carrier AL 1535 Wood



Carrier Track CXE

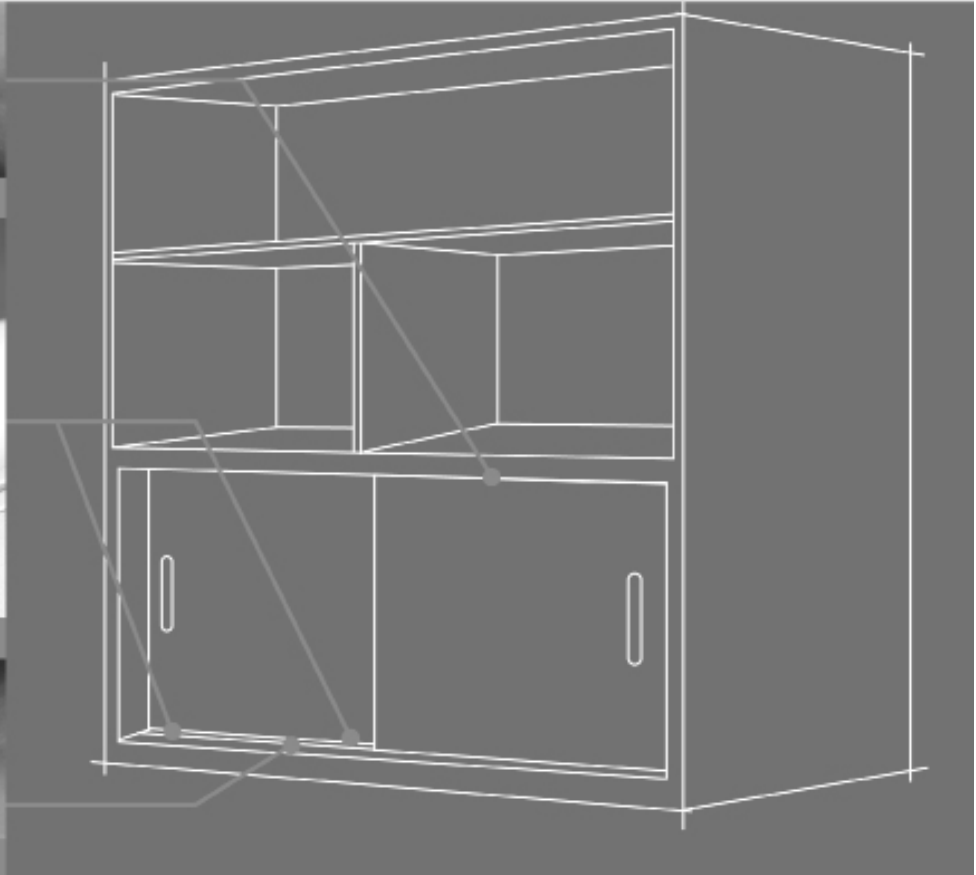

APPLICATIONS AND MAIN FEATURES

Floor sliding system for bypass wood doors installed inlay the opening. Ideal for furniture applications.

One box with all you need to install 2 doors, just order the track and guide and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

Stoppers are installed inside the track.

Carrier perforations are in system 32, for mechanical installations.


Furniture System



AL 1535 Wood

FURNITURE SYSTEM

LINEA
 Mobile




CARRIER TRACK



TRACK CXE

PART NUMBER	DESCRIPTION
• 021CXE1	Track CXE inset AL 2m (6.5 ft)
• 021CXE2	Track CXE inset AL 3m (9.85 ft)

MASTER PACK: 10 units

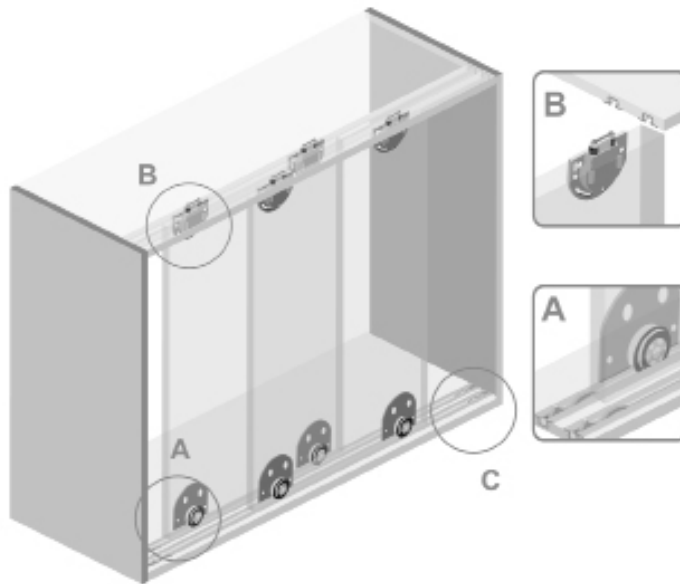


AL 1535 for Wood doors,
 carrier set for 2 doors

PART NUMBER: 012103


- A** 4 Carriers AL1535
- B** 4 Top guides with clip device
- C** 4 Stoppers with retention devices
- D** Screws

MASTER PACK: 10 sets

MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64



CARRIER INSTALLATION



GUIDE INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Floor Sliding

Section B-5: Ducasse & Hettich

FURNITURE SYSTEM

FLOOR SLIDING

D 25

DUCASSE
U S A



BYPASS / INLAY
DOOR SYSTEM

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT

MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
GAP

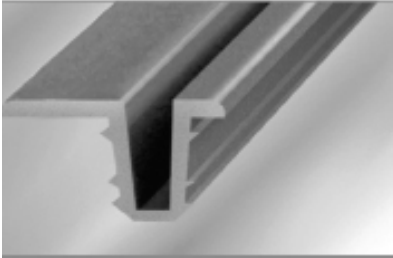

Track D25 PVC



Carrier D 25

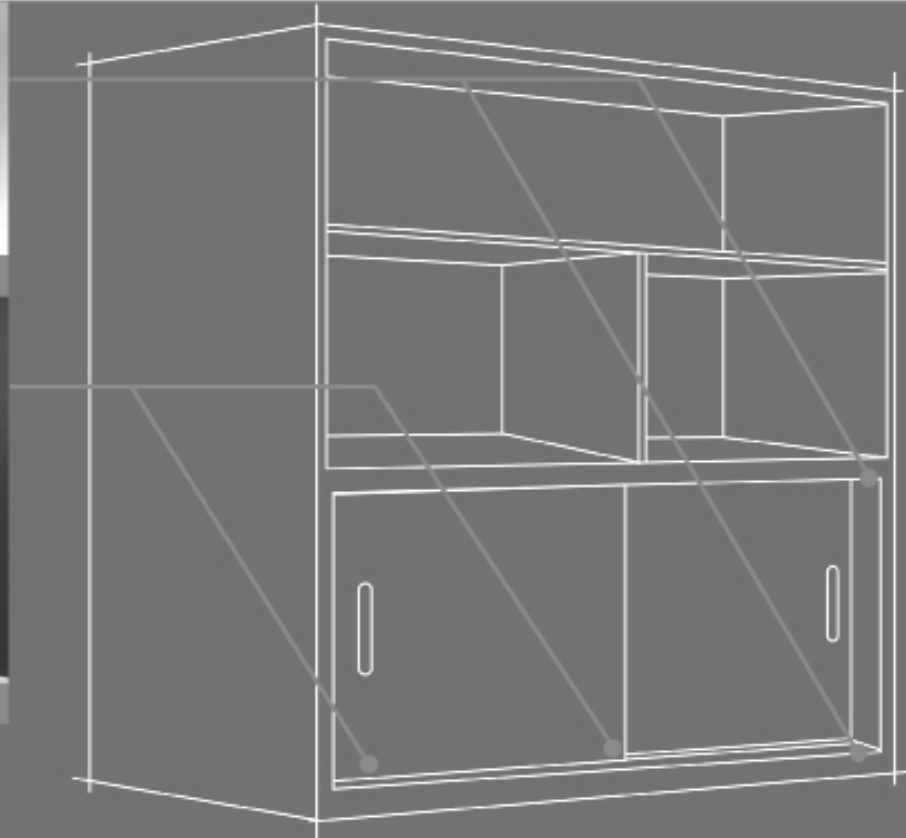

APPLICATIONS AND MAIN FEATURES

Floor sliding system for bypass doors installed inlay the opening. Ideal for furniture applications.

One box with all you need to install 2 doors, just order the track and you are ready to go.

Easy to install and regulate.

Furniture System




D 25

FURNITURE SYSTEM

LINEA
 Mobile



400 HRS
 SALINITY
 TEST



NO

SYSTEM 32



ROLLER



CARRIER TRACK



TRACK D25 PVC

PART NUMBER	DESCRIPTION
• 024D252-WT	Track D25 PVC, White 3m (9.85 ft)
• 024D252-BR	Track D25 PVC, Brown 3m (9.85 ft)
• 024D252-BL	Track D25 PVC, Black 3m (9.85 ft)
• 024D252-SV	Track D25 PVC, Silver 3m (9.85 ft)
• 024D252-BE	Track D25 PVC, Beige 3m (9.85 ft)
• 024D252-CA	Track D25 PVC, Caramel 3m (9.85 ft)

MASTER PACK: 20 units

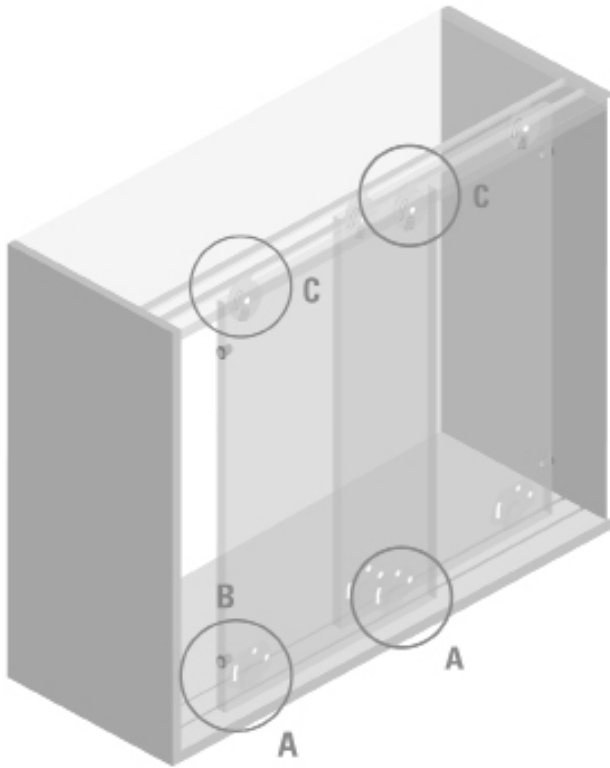

D-25
 carrier set for 2 doors

PART NUMBER: 012101

A	4 Carriers D 25	
B	4 Stoppers	
C	4 Upper guides	
D	Screws	

MASTER PACK: 30 sets
 MASTER PACK SIZE: 9'25/32 x 7'13/32 x 7'11/64



CARRIER
 INSTALLATION



GUIDE
 INSTALLATION



LATERAL
 VIEW

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Furniture System

FURNITURE SYSTEM

4 SLIDING POINTS

ALX 12

DUCASSE 
U S A



IN LINE / OVERLAY
DOOR SYSTEM



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT




DOOR FRAME
MATERIAL



DOOR / TRACK
GAP




Carrier Track FCX



Fascia LX



Carrier ALX 12

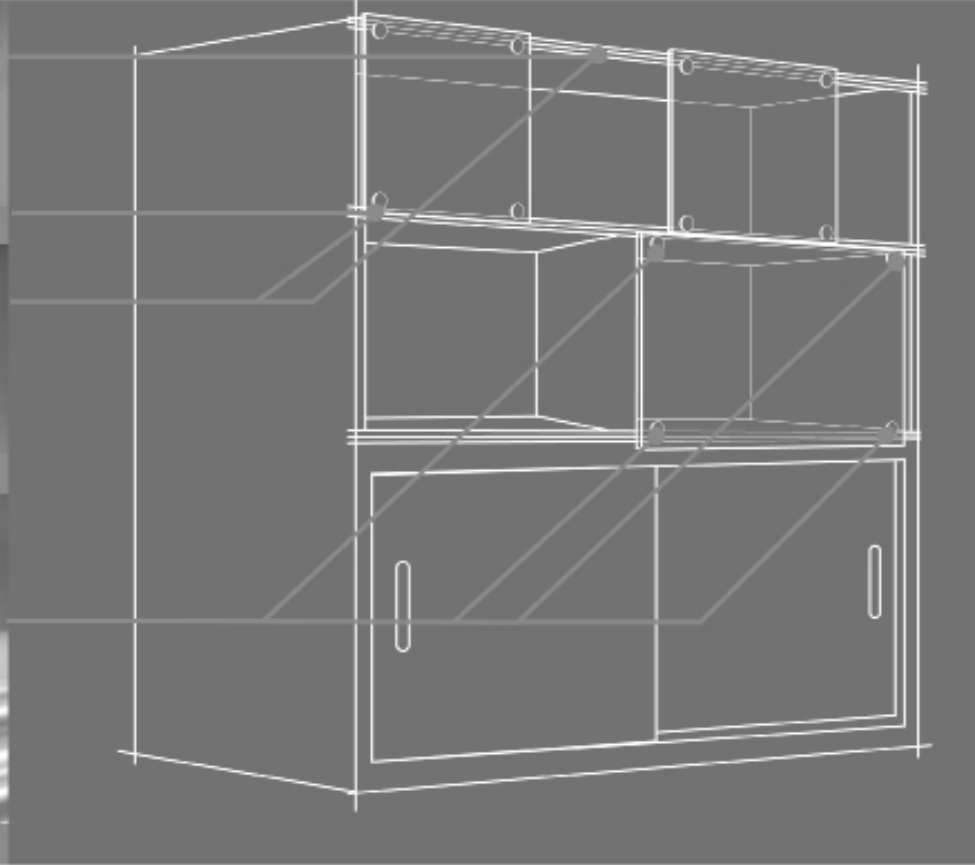

APPLICATIONS AND MAIN FEATURES

4 Points Sliding system for inline glass doors installed overlay the opening. Ideal for furniture applications.

One box with all you need to install 1 door, just order the track, the fascia and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

Stoppers are installed inside the track.

More doors can be installed one on top of the other.






Furniture System




ALX 12

FURNITURE SYSTEM


LINEA
 Mobile

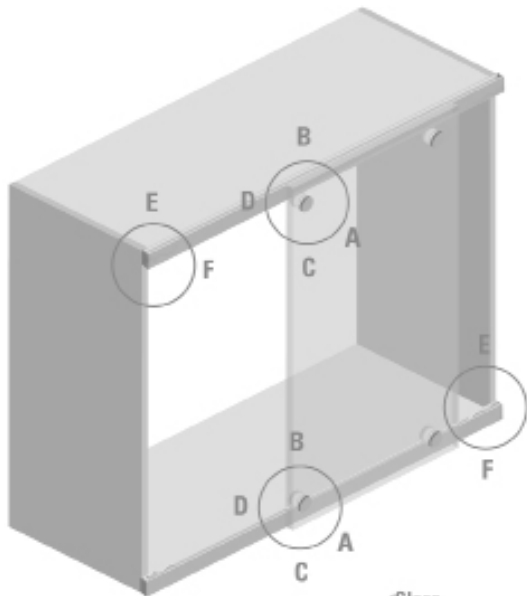

DOOR IS FLUSHED WITH THE FRAME



DOOR EXCEEDS THE FRAME



2 DOORS ONE ON TOP OF THE OTHER

ALL DIMENSIONS ARE IN MM, CM, KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

CARRIER TRACK



TRACK FCX

PART NUMBER	DESCRIPTION
• 021FCX1	Track FCX 2m (6.5 ft)
• 021FCX2	Track FCX 3m (9.85 ft)

MASTER PACK: 10 units

FASCIA



FASCIA LX

PART NUMBER	DESCRIPTION
• 041ALX1	Fascia LX AL 2m (6.5 ft)
• 041ALX2	Fascia LX AL 3m (9.85 ft)

MASTER PACK: 10 units

ALX 12,
 carrier set for 1 door

PART NUMBER: 012405

- A** 4 Bolts with plastic cover
- B** 4 Eccentric Displacers
- C** 4 Rollers
- D** 4 Nuts
- E** 2 Stoppers
- F** 4 Track End Caps
- G** 1 ALX Wrench
- H** Screws

MASTER PACK: 10 sets
 MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64

Maverick Hardware

Furniture System

FURNITURE SYSTEM

4 SLIDING POINTS

AL 1524

DUCASSE 
U S A



IN LINE / INLAY OR
OVERLAY
DOOR SYSTEM



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT



DOOR FRAME
MATERIAL




DOOR / TRACK
GAP



Carrier Track CXE



Carrier AL 1524

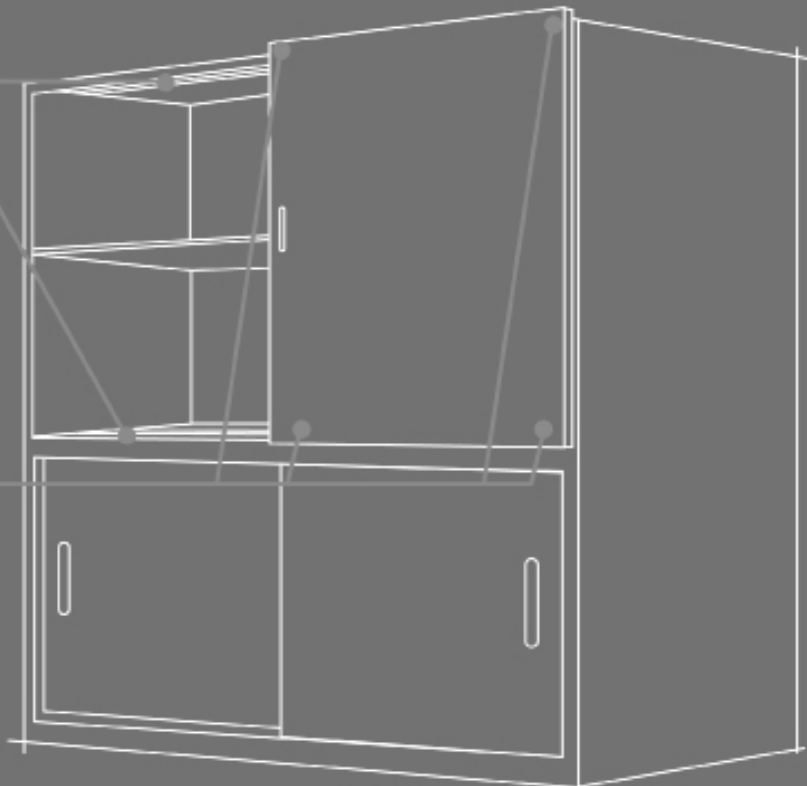

APPLICATIONS AND MAIN FEATURES

4 Points sliding system for wood or aluminum doors installed inlay or overlay the opening. Ideal for furniture applications.

One box with all you need to install 1 door, just order the track and you are ready to go.


Ball bearing high quality rollers for a silent and smooth glide.

2 tracks can be installed for bypass door travelling. The external door can be overlay the opening.

Furniture System



AL 1524



FURNITURE SYSTEM

LINEA
Mobile


CARRIER TRACK



CARRIER TRACK CXE

PART NUMBER	DESCRIPTION
• 021CXE1	Track CXE inset AL 2m (6.5 ft)
• 021CXE2	Track CXE inset AL 3m (9.85 ft)

MASTER PACK: 10 units

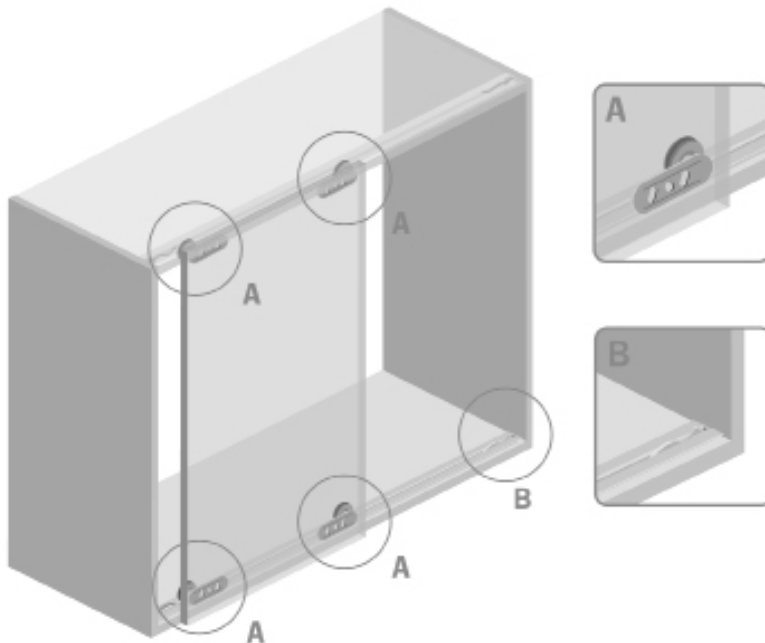

**AL 1524,
 carrier set for 1 door**


PART NUMBER: 012403

A	4 Carriers AL1524
B	2 Stoppers
C	Screws


MASTER PACK: 10 sets
 MASTER PACK SIZE: 6'25/32 x 7'13/32 x 7'11/64



DOOR OVERLAY
 THE OPENING



DOOR INLAY
 THE OPENING



CARRIER
 INSTALLATION

ALL DIMENSIONS ARE IN MM, CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Furniture System

FURNITURE SYSTEM

4 SLIDING POINTS

AL 1540

DUCASSE 
U S A



IN LINE / INLAY OR
OVERLAY
DOOR SYSTEM

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT


MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL

DOOR / TRACK
GAP




Carrier Track FCX



Fascia LX



Carrier AL1540

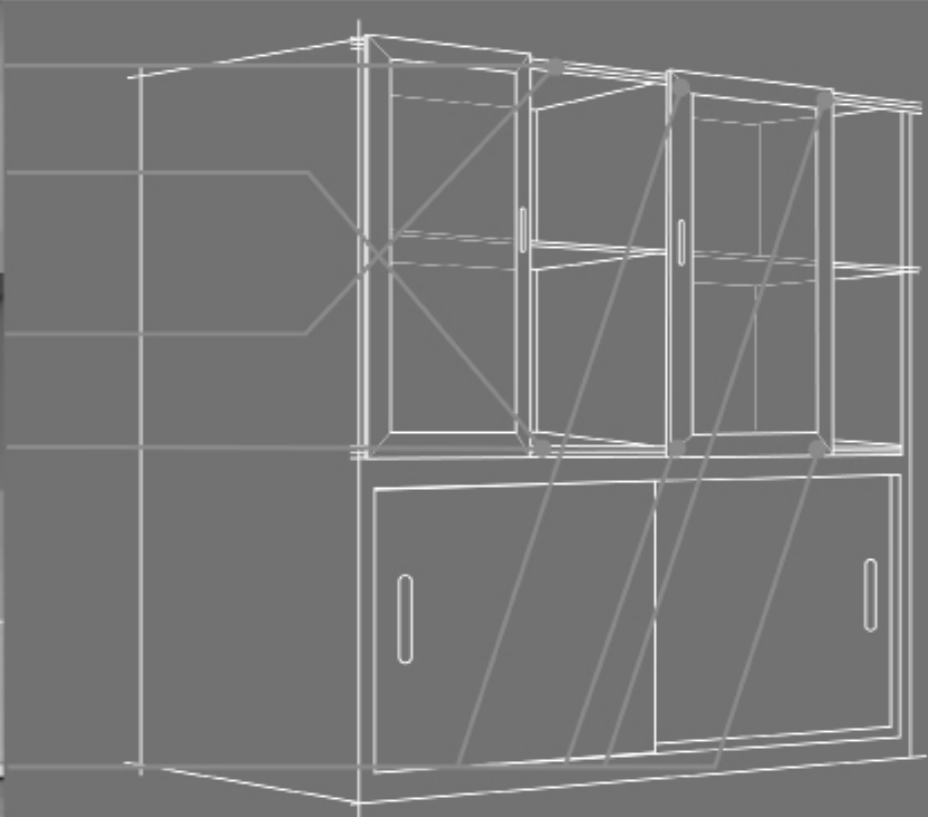

APPLICATIONS AND MAIN FEATURES

4 Points Sliding system for inline wood or aluminum doors.

Doors can be installed inlay the opening using the track CXE.

Doors can be installed overlay the opening using the track FCX.

One box with all you need to install 1 door, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.






Stoppers are installed inside the track.

CXE tracks can be installed for bypass door travelling.


Furniture System



AL 1540

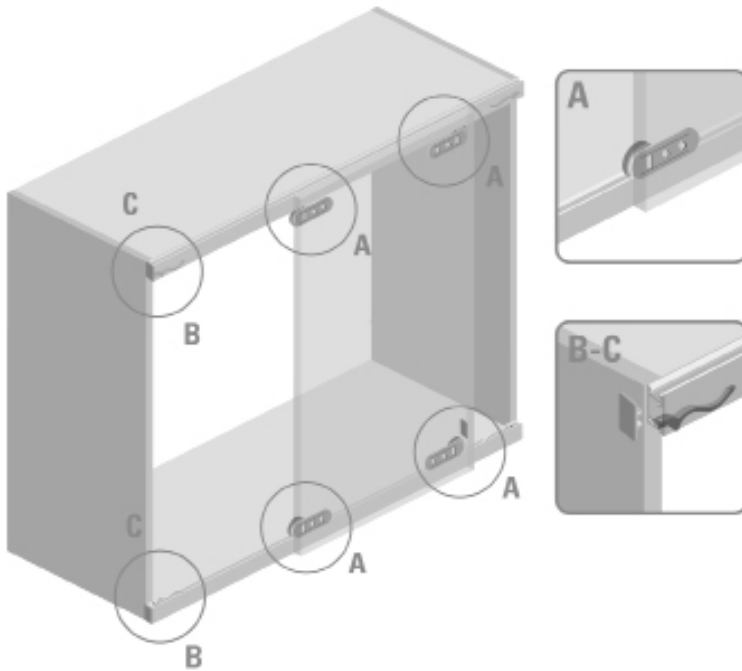

TRACK CXE FOR DOOR
INLAY THE OPENING



TRACK FCX FOR DOOR
OVERLAY THE OPENING



CARRIER
INSTALLATION

ALL DIMENSIONS ARE IN MM, CM, KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

FURNITURE SYSTEM

LINEA
Mobile

CARRIER TRACK OPTIONS



TRACK FCX

PART NUMBER	DESCRIPTION
• 021FCX1	Track FCX 2m (6.5 ft)
• 021FCX2	Track FCX 3m (9.85 ft)

MASTER PACK: 10 units



FASCIA LX

PART NUMBER	DESCRIPTION
• 041ALX1	Fascia LX 2m (6.5 ft)
• 041ALX2	Fascia LX 3m (9.85 ft)

MASTER PACK: 10 units



CARRIER TRACK CXE

PART NUMBER	DESCRIPTION
• 021CXE1	Track CXE 2m (6.5 ft)
• 021CXE2	Track CXE 3m (9.85 ft)

MASTER PACK: 10 units

AL 1540
carrier set for 1 door

PART NUMBER: 612484

- A** 4 Carriers AL1540
- B** 2 Stoppers
- C** 4 Track End Caps
- D** Screws

MASTER PACK: 10 sets
 MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64

Maverick Hardware

Top Sliding

CLASSIC LINE

TOP SLIDING

DN 50 CF

DUCASSE
U S A



IN LINE / INLAY
*WITH L BRACKET
INLINE / OVERLAY



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT




DOOR FRAME
MATERIAL




DOOR / TRACK
GAP



Track U45 AL

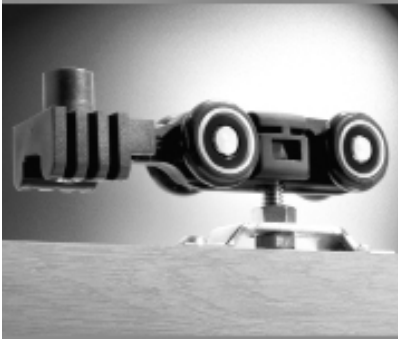

Carrier DN 50 CF

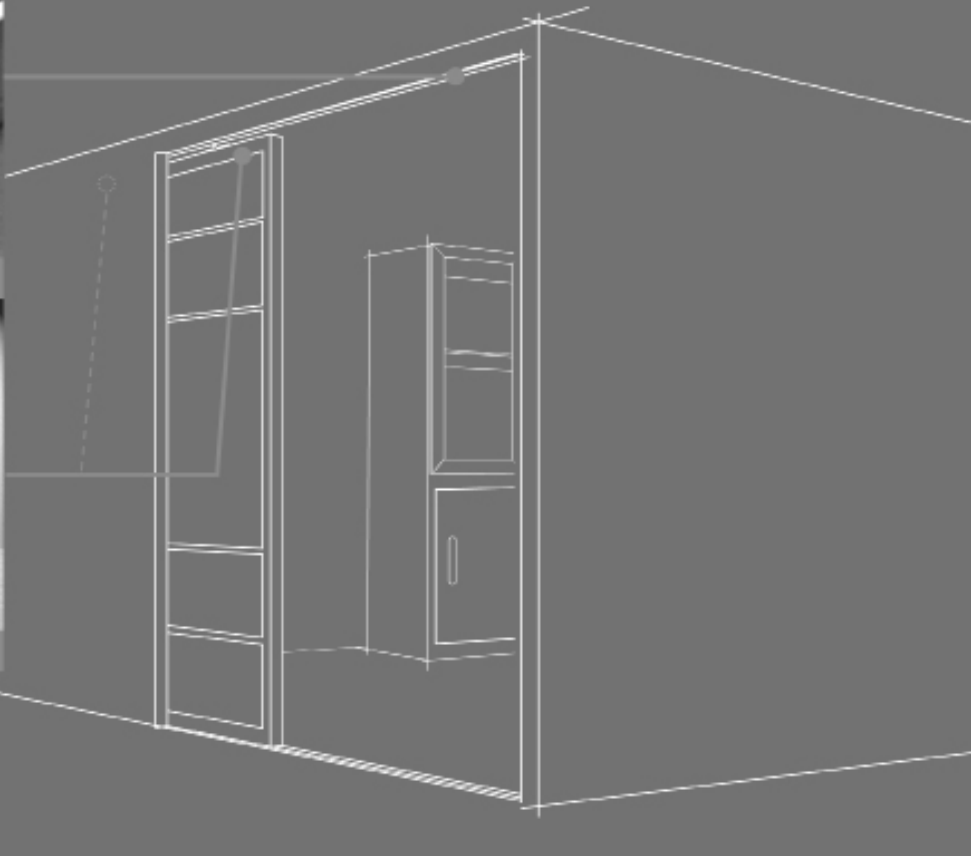

APPLICATIONS AND MAIN FEATURES

Top sliding system for doors installed inlay the opening and traveling inline.

Installation of 2 tracks U45 in parallel allows for 2 doors traveling in bypass.

One box with all you need to install 1 door, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

110 lbs max weight per door.

Stoppers with retention device installed inside the track will stop and retain the door in position.

U 45 aluminum track for a silent glide.

Fascia for U 45 track (accessory) will easily install with a snap providing an elegant finishing.

Bracket for U 45 track (accessory) will allow the installation of the track to the wall, avoiding the need of structural modifications in your room.

Classic Line



DN 50 CF

CLASSIC LINE
 LINEA
SEGMENTA







ANSI-BHMA*




SYSTEM 32




ROLLER

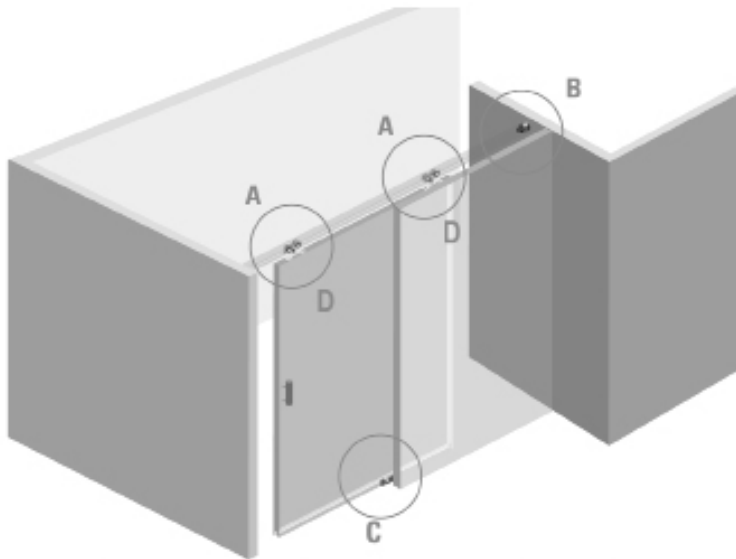

CARRIER
 INSTALLATION



TRACK
 INSTALLATION



GUIDE
 INSTALLATION

	Door Thickness
Track only	$E \geq 18\text{mm}$ (3/4")
Track + Fascia	$18\text{ mm (3/4")} \geq E \leq 30\text{mm (1"3/16)}$
Track + Bracket U21	$18\text{ mm (3/4")} \geq E \leq 30\text{mm (1"3/16)}$
Track + Bracket U21W	$18\text{ mm (3/4")} \geq E \leq 45\text{mm (1"3/4)}$

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

CARRIER TRACK



TRACK U45 AL

PART NUMBER	DESCRIPTION
• 021U451	Track U45 AL 2m (6.5 ft)
• 021U452	Track U45 AL 3m (9.85 ft)
MASTER PACK: 10 units	

DN 50 CF,
 set for 1 door

PART NUMBER: 013214

- A** 2 Carriers DN 50
- B** 2 Slippers with retention device
- C** 1 Floor guide GP-12
- D** 2 Mounting plate
- E** Screws

MASTER PACK: 20 sets
 MASTER PACK SIZE: 8"25/32 x 7"13/32 x 7"11/64

ACCESSORIES



FASCIA U45

PART NUMBER	DESCRIPTION
• 041U4521	Fascia U45 AL 62mm H, 2m (6.5 ft)
• 041U4522	Fascia U45 AL 62mm H, 3m (9.85 ft)
MASTER PACK: 5 units	



*LATERAL BRACKET FOR OVERLAY INSTALLATION

PART NUMBER	DESCRIPTION
• 023BRAU21	Bracket 31mm for Track U21 and U45
• 023BRAU21W	Bracket 44mm for Track U21 and U45

Maverick Hardware

Top Sliding

CLASSIC LINE

TOP SLIDING

DN 50 Concealed LT

DUCASSE
U S A



IN LINE / INLAY
"WITH L BRACKET
INLINE / OVERLAY

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT


MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
GAP



Track U45 AL

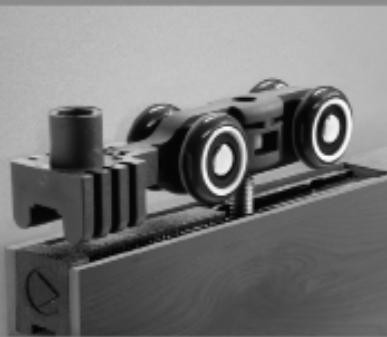

Carrier DN 50 Concealed LT

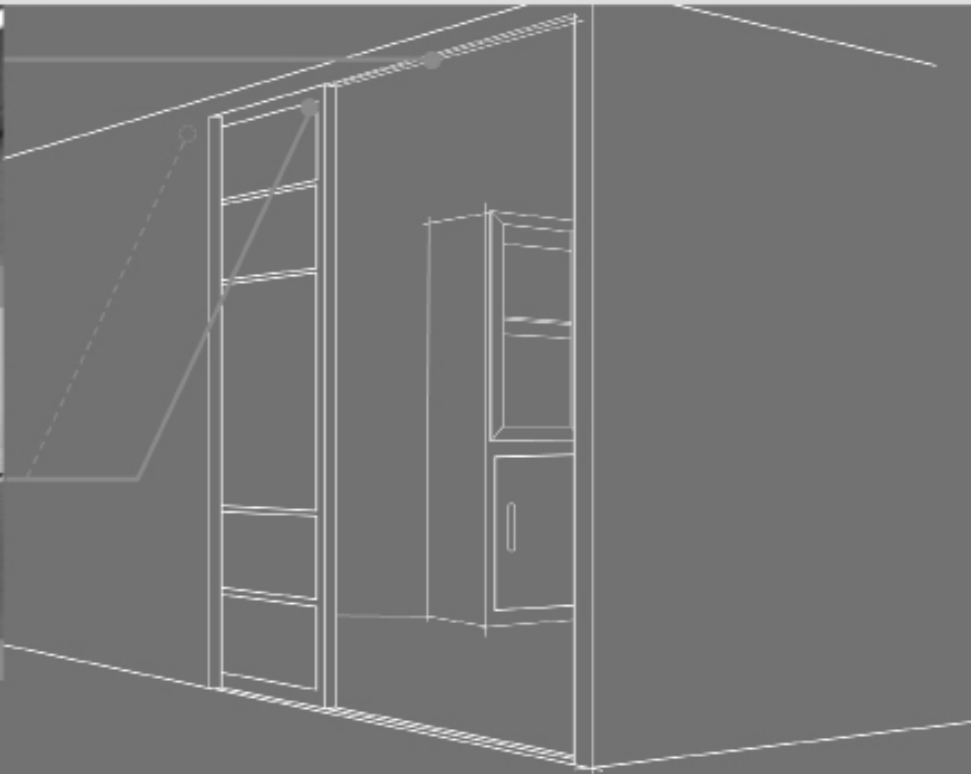

APPLICATIONS AND MAIN FEATURES

Top sliding system for doors installed inlay the opening and traveling inline.

Installation of 2 tracks U45 in parallel allows for 2 doors traveling in bypass.

One box with all you need to install 1 door, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

110 lbs max weight per door.

Stoppers with retention device installed inside the track will stop and retain the door in position.

U 45 aluminum track for a silent glide.

Fascia for U 45 track (accessory) will easily install with a snap providing an elegant finishing.

Bracket for U 45 track (accessory) will allow the installation of the track to the wall, avoiding the need of structural modifications in your room.

Ideal for partitions applications where minimizing the gap between door and track is a must. With only 5/64" gap, DN 50 Conceal is your choice.

Carrier is installed laterally making the installation an easy process.


Classic Line



DN 50 Concealed LT

CLASSIC LINE

LINEA SEGMENTA







CARRIER TRACK



TRACK U45 AL

PART NUMBER	DESCRIPTION
+021U451	Track U45 AL 2m (6.5 ft)
+021U452	Track U45 AL 3m (9.85 ft)

MASTER PACK: 10 units

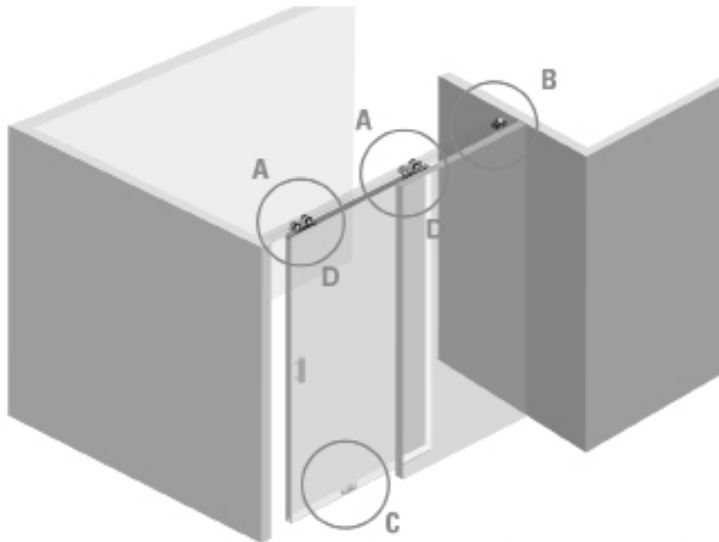

TRACK INSTALLATION

GUIDE INSTALLATION

	Door Thickness
Track only	$E \geq 24\text{mm}$ (1")
Track + Fascia	$24\text{ mm (1")} \geq E \leq 30\text{mm (1"3/16)}$
Track + Bracket U21	$24\text{ mm (1")} \geq E \leq 30\text{mm (1"3/16)}$
Track + Bracket U21W	$24\text{ mm (1")} \geq E \leq 45\text{mm (1"3/4)}$

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

DN 50 Concealed LT, set for 1 door

PART NUMBER: 013215

- A** 2 Carriers DN 50
- B** 2 Stoppers with retention device
- C** 1 Floor guide GP-12
- D** 2 Plates
- E** 2 Lateral covers
- F** Screws

MASTER PACK: 10 sets

MASTER PACK SIZE: 8"25/32 x 7"13/32 x 7"11/64

ACCESSORIES



FASCIA U45

PART NUMBER	DESCRIPTION
+041U45621	Fascia U45 AL 62mm H, 2m (6.5 ft)
+041U45622	Fascia U45 AL 62mm H, 3m (9.85 ft)

MASTER PACK: 5 units



*LATERAL BRACKET FOR OVERLAY INSTALLATION

PART NUMBER	DESCRIPTION
+023BRAU21	Bracket 31mm for Track U21 and U45
+023BRAU21W	Bracket 44mm for Track U21 and U45

Maverick Hardware

Top Sliding

CLASSIC LINE

TOP SLIDING

DN 80 CF

DUCASSE
U S A



IN LINE / INLAY
*WITH L BRACKET
INLINE / OVERLAY



176 LBS
80 KG
MAX DOOR
WEIGHT



>20 mm
>3/16"
DOOR
THICKNESS



NONE
MAX DOOR
WIDTH



NONE
MAX DOOR
HEIGHT




N.A.
MIN DOOR
FRAME HEIGHT



WOOD
DOOR FRAME
MATERIAL




19.5 MM
3/4"
5 MM
1/8"
DOOR / TRACK
GAP

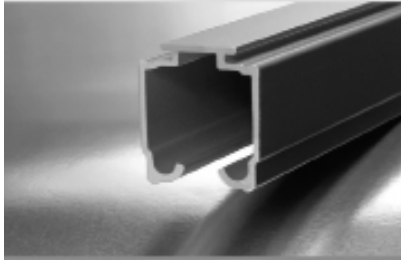

Track U21 AL



Carrier DN 80 CF

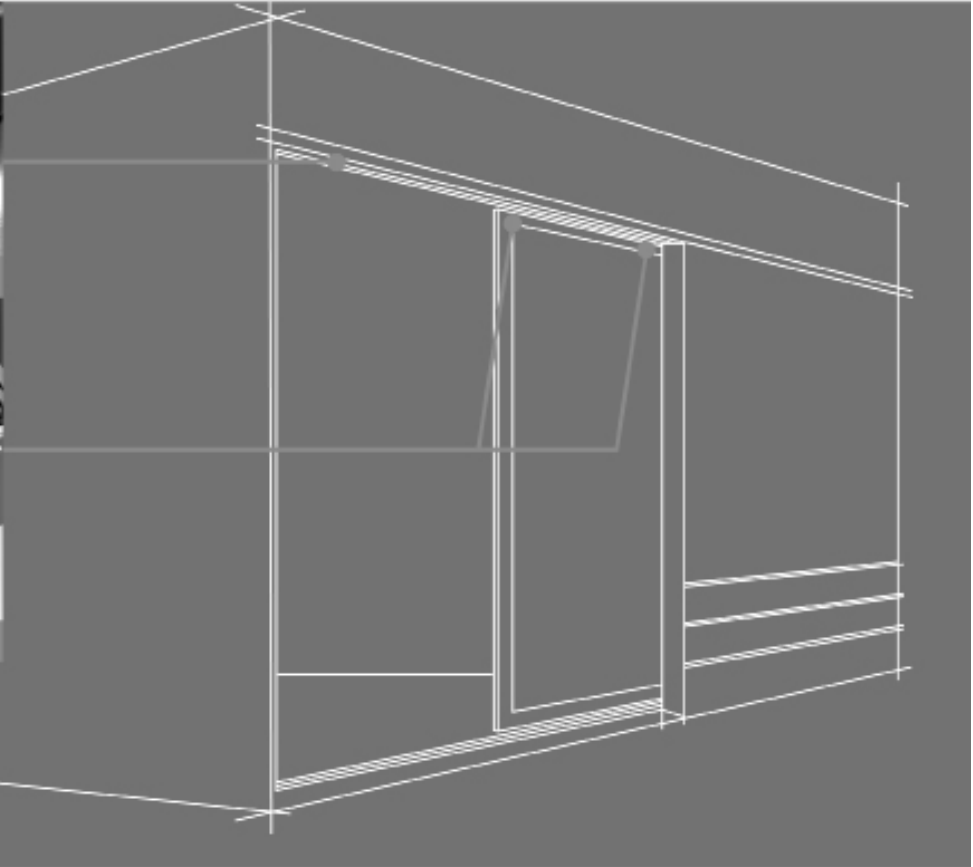

APPLICATIONS AND MAIN FEATURES

Top sliding system for doors installed inlay the opening and traveling inline.

Installation of 2 U21 tracks in parallel allows for 2 doors traveling in bypass.

One box with all you need to install 1 door, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

176 lbs max weight per door.

Stoppers with retention device installed inside the track will stop and retain the door in position.

U 21 aluminum track for a silent glide.

Fascia for U 21 track (accessory) will easily install with a snap providing an elegant finishing.

Bracket for U 21 track (accessory) will allow the installation of the track to the wall, avoiding the need of structural modifications in your room.


Classic Line



DN 80 CF

CLASSIC LINE

LINEA SEGMENTA






CARRIER TRACK




TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL 2m (6.5 ft)
• 021U212	Track U21 AL 3m (9.85 ft)
• 021U213	Track U21 AL 6m (19.7 ft)
• 021U21-8	Track U21 AL 8 ft
• 021U21-12	Track U21 AL 12 ft


MASTER PACK: 10 units

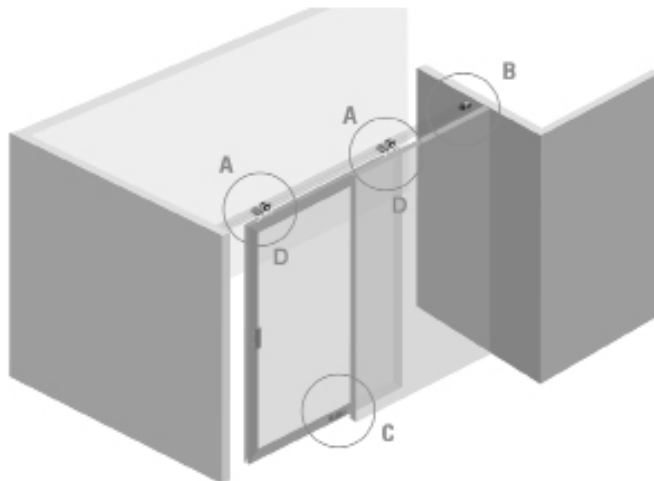

CARRIER INSTALLATION



TRACK INSTALLATION



GUIDE INSTALLATION

	Door Thickness
Track only	$E \geq 20 \text{ mm (13/16")}$
Track + Fascia	$20 \text{ mm (13/16")} \geq E \leq 38 \text{ mm (1 1/2")}$
Track + Bracket U21	$20 \text{ mm (13/16")} \geq E \leq 30 \text{ mm (1 3/16")}$
Track + Bracket U21W	$29 \text{ mm (1 1/8")} \geq E \leq 45 \text{ mm (1 3/4")}$

ALL DIMENSIONS ARE IN MM, CM, KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

DN 80 CF, set for 1 door

PART NUMBER: 013203

- A** 2 Carriers DN 80
- B** 2 Stoppers with retention device
- C** 1 Floor guide GP-12
- D** 2 Mounting plate
- E** Screws

MASTER PACK: 10 sets
 MASTER PACK SIZE: 6'25/32 x 7'13/32 x 7'11/64

ACCESSORIES

FASCIA U21

PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL 120mm H, 6m (19.7 ft)

• 041U21661	Fascia U21 AL 66mm H, 2m (6.5 ft)
• 041U21662	Fascia U21 AL 66mm H, 3m (9.85 ft)
• 041U21663	Fascia U21 AL 66mm H, 6m (19.7 ft)
• 041U2166-8	Fascia U21 AL 66mm H, 8ft
• 041U2166-12	Fascia U21 AL 66mm H, 12ft

MASTER PACK: 5 units

*LATERAL BRACKET FOR OVERLAY INSTALLATION

PART NUMBER	DESCRIPTION
• 023BRAU21	Bracket 31mm for Track U21 and U45
• 023BRAU21W	Bracket 44mm for Track U21 and U45

Maverick Hardware

Top Sliding

CLASSIC LINE

TOP SLIDING

DN 80 Concealed FT

DUCASSE
U S A



IN LINE / INLAY
*WITH L BRACKET
INLINE / OVERLAY



176 LBS
80 KG
MAX DOOR
WEIGHT



>25 mm
>1"
DOOR
THICKNESS



NONE
MAX DOOR
WIDTH



NONE
MAX DOOR
HEIGHT




N.A.
MIN DOOR
FRAME HEIGHT



WOOD OR
ALUMINUM
DOOR FRAME
MATERIAL




3 MM
1/8"
4 MM
5/32"
DOOR / TRACK
GAP

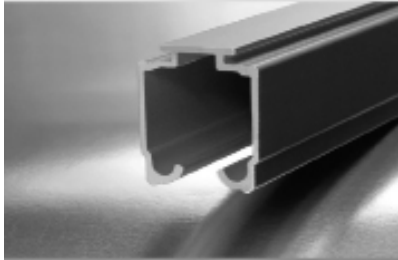

Track U21 AL



Carrier DN 80 Concealed FT

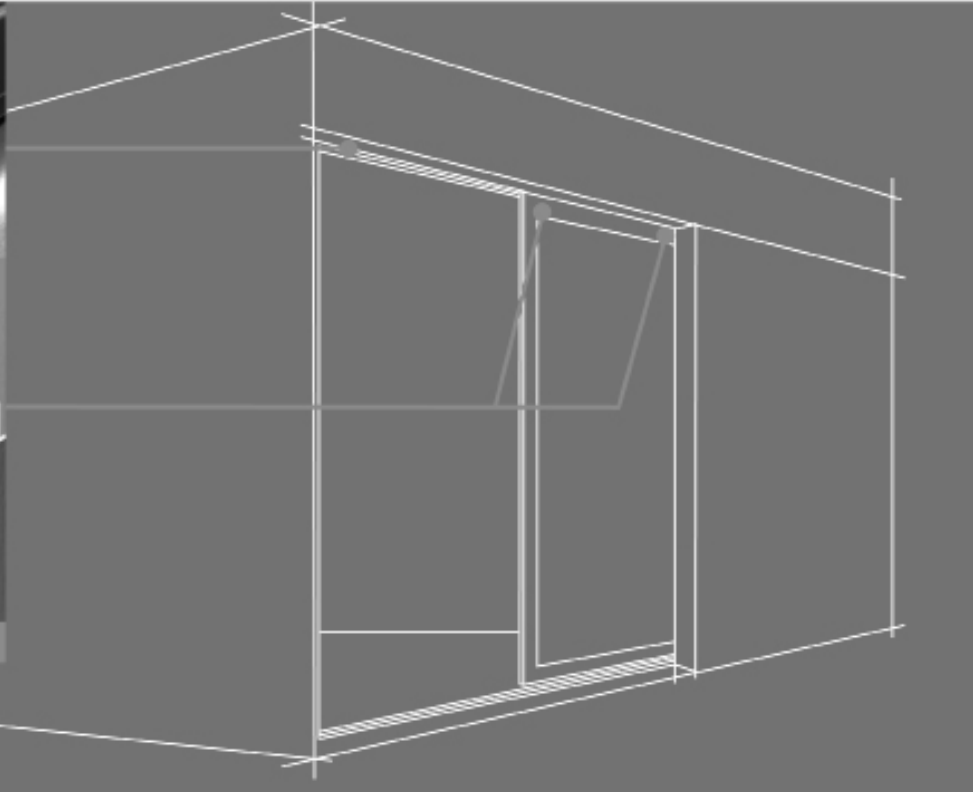

APPLICATIONS AND MAIN FEATURES

Top sliding system for doors installed inlay the opening and traveling inline. Frontal installation of the carrier.

Ideal for partitions and applications where minimizing the gap between door and track is a must. With only 1/8" gap, the DN 80 Conceal is your choice.

Installation of 2 tracks U21 in parallel allows for 2 doors traveling in bypass.

One box with all you need to install 1 door, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

176 lbs max weight per door.

Stoppers with retention device installed inside the track will stop and retain the door in position.

U21 aluminum track for a silent glide.

Fascia for U21 track (accessory) will easily install with a snap providing an elegant finishing.

Bracket for U21 track (accessory) will allow the installation of the track to the wall, avoiding the need of structural modifications in your room.


Classic Line



DN 80 Concealed FT

CLASSIC LINE

LINEA SEGMENTA



CARRIER TRACK



TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL 2m (6.5 ft)
• 021U212	Track U21 AL 3m (9.85 ft)
• 021U213	Track U21 AL 6m (19.7 ft)
• 021U21-8	Track U21 AL 8 ft
• 021U21-12	Track U21 AL 12 ft

MASTER PACK: 10 units

DN 80 Concealed FT, set for 1 door

PART NUMBER: 013206

- A** 2 Carriers DN 80
- B** 2 Stoppers with retention device
- C** 1 Floor guide GP-12
- D** 2 Mounting plate
- E** Regulation key
- F** Screws

MASTER PACK: 10 sets

MASTER PACK SIZE: 6'25/32 x 7'13/32 x 7'11/64

ACCESSORIES



FASCIA U21




PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL 120mm H, 6m (19.7 ft)
• 041U21661	Fascia U21 AL 66mm H, 2m (6.5 ft)
• 041U21662	Fascia U21 AL 66mm H, 3m (9.85 ft)
• 041U21663	Fascia U21 AL 66mm H, 6m (19.7 ft)
• 041U2166-8	Fascia U21 AL 66mm H, 8ft
• 041U2166-12	Fascia U21 AL 66mm H, 12ft

MASTER PACK: 5 units




*LATERAL BRACKET FOR OVERLAY INSTALLATION


PART NUMBER	DESCRIPTION
• 023BRAU21	Bracket 31mm for Track U21 and U45
• 023BRAU21W	Bracket 44mm for Track U21 and U45

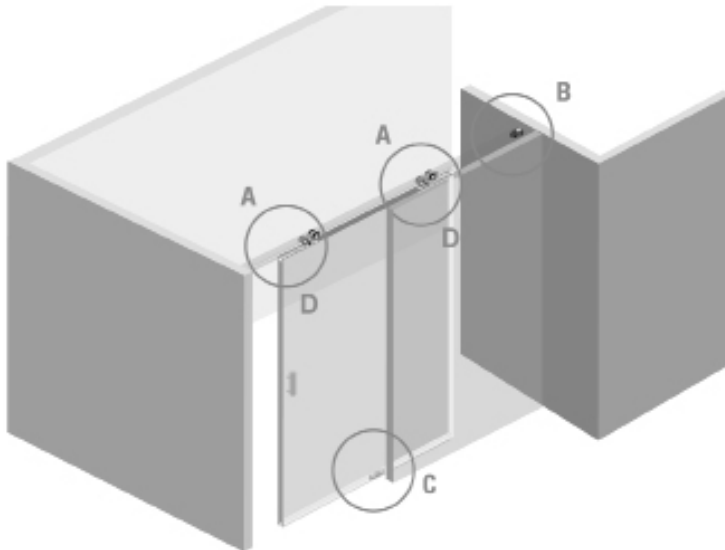

CARRIER INSTALLATION



TRACK INSTALLATION



GUIDE INSTALLATION

	Door Thickness
Track only	E ≥ 25mm (1")
Track + Fascia	25 mm (1") ≥ E ≤ 38mm (1 1/2)
Track + Bracket U21	25 mm (1") ≥ E ≤ 30mm (1 3/16)
Track + Bracket U21W	29mm (1 1/8) ≥ E ≤ 45mm (1 3/4)

ALL DIMENSIONS ARE IN MM, CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms
 sales@ducasseusa.com | www.ducasseusa.com

Maverick Hardware

Top Sliding

CLASSIC LINE

TOP SLIDING

DN 80 Concealed LT

DUCASSE
U S A



IN LINE / INLAY
*WITH L BRACKET
IN LINE / OVERLAY



176 LBS
80 KG

MAX DOOR
WEIGHT



>28 mm
≥1" 1/8

DOOR
THICKNESS



NONE

MAX DOOR
WIDTH



NONE

MAX DOOR
HEIGHT



N.A.

MIN DOOR
FRAME HEIGHT



WOOD


DOOR FRAME
MATERIAL



2 MM
5/64"

3 MM
1/8"


DOOR / TRACK
GAP

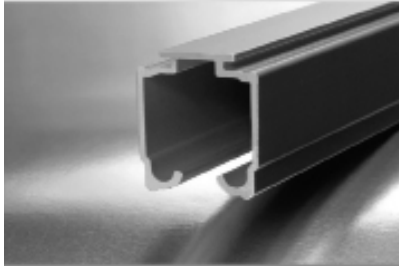

Track U21 AL



Carrier DN 80 Concealed LT

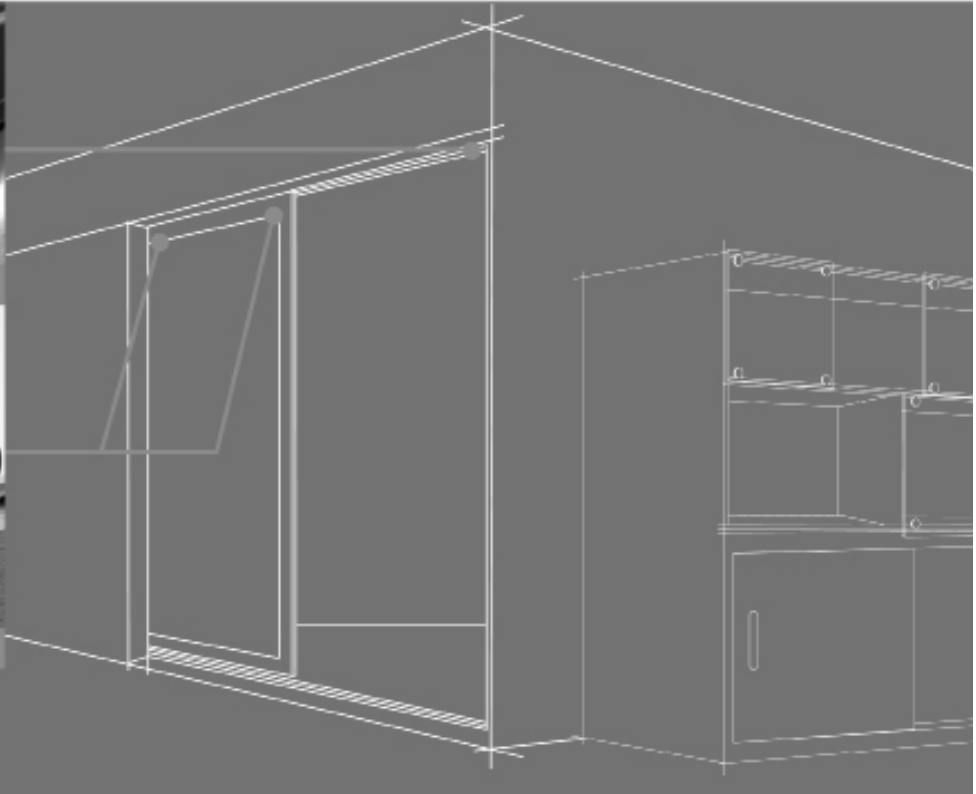

APPLICATIONS AND MAIN FEATURES

Top sliding system for doors installed inlay the opening and traveling inline.

Carrier is installed laterally making the installation an easy process.

Ideal for partitions and applications where minimizing the gap between door and track is a must. With only 5/64" gap, the DN 80 Conceal LT is your choice.

Installation of 2 tracks U21 in parallel allows for 2 doors traveling in bypass.

One box with all you need to install 1 door, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

176 lbs max weight per door.

Stoppers with retention device installed inside the track will stop and retain the door in position.

U21 aluminum track for a silent glide.

Fascia for U21 track (accessory) will easily install with a snap providing an elegant finishing.

Bracket for U21 track (accessory) will allow the installation of the track to the wall, avoiding the need of structural modifications in your room.


Classic Line



DN 80 Concealed LT

CLASSIC LINE

LINEA SEGMENTA






CARRIER TRACK




TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL, 2m (6.5 ft)
• 021U212	Track U21 AL, 3m (9.85 ft)
• 021U213	Track U21 AL, 6m (19.7 ft)
• 021U21-8	Track U21 AL, 8 ft
• 021U21-12	Track U21 AL, 12 ft


MASTER PACK: 10 units

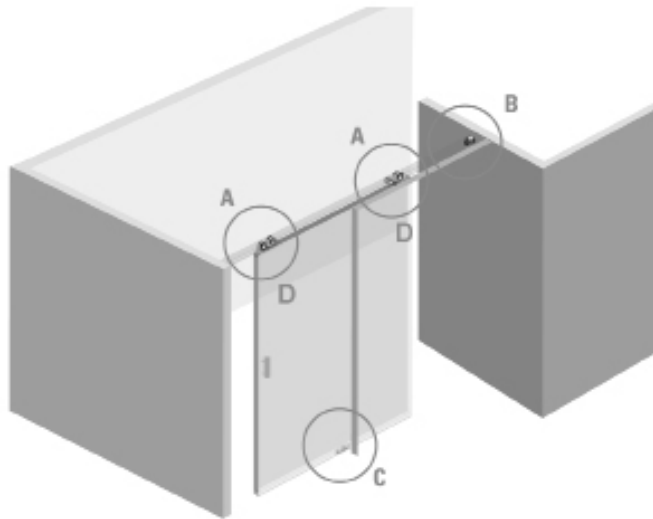

CARRIER INSTALLATION



TRACK INSTALLATION



GUIDE INSTALLATION

	Door Thickness
Track only	$E \geq 29\text{mm}$ (1"1/8)
Track + Fascia	29 mm (1"1/8) $\geq E \leq 38\text{mm}$ (1"1/2)
Track + Bracket U21	29 mm (1"1/8) $\geq E \leq 30\text{mm}$ (1"3/16)
Track + Bracket U21W	29mm (1"1/8) $\geq E \leq 45\text{mm}$ (1"3/4)

ALL DIMENSIONS ARE IN MM, CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms
sales@ducasseusa.com | www.ducasseusa.com

DN 80 Concealed LT, set for 1 door

PART NUMBER: 013213

- A** 2 Carriers DN 80
- B** 2 Stoppers with retention device
- C** 1 Floor guide GP-12
- D** 2 Plates
- E** 2 Lateral covers
- F** Screws

MASTER PACK: 10 sets
 MASTER PACK SIZE: 8"25/32 x 7"13/32 x 7"11/64

ACCESSORIES

FASCIA U21

PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL, 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL, 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL, 120mm H, 6m (19.7 ft)
• 041U21661	Fascia U21 AL, 66mm H, 2m (6.5 ft)
• 041U21662	Fascia U21 AL, 66mm H, 3m (9.85 ft)
• 041U21663	Fascia U21 AL, 66mm H, 6m (19.7 ft)
• 041U2166-8	Fascia U21 AL, 66mm H, 8ft
• 041U2166-12	Fascia U21 AL, 66mm H, 12ft

MASTER PACK: 5 units



*LATERAL BRACKET FOR OVERLAY INSTALLATION

PART NUMBER	DESCRIPTION
• 023BRAU21	Bracket 31mm for Track U21 and U45
• 023BRAU21W	Bracket 44mm for Track U21 and U45

Maverick Hardware

Folding System

CLASSIC LINE

FOLDING SYSTEM

DN 80 PL 2

DUCASSE
U S A



FOLDING / INLAY
SYSTEM



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT



DOOR FRAME
MATERIAL




DOOR / TRACK
GAP



Track U21 AL



Carrier DN 80 PL

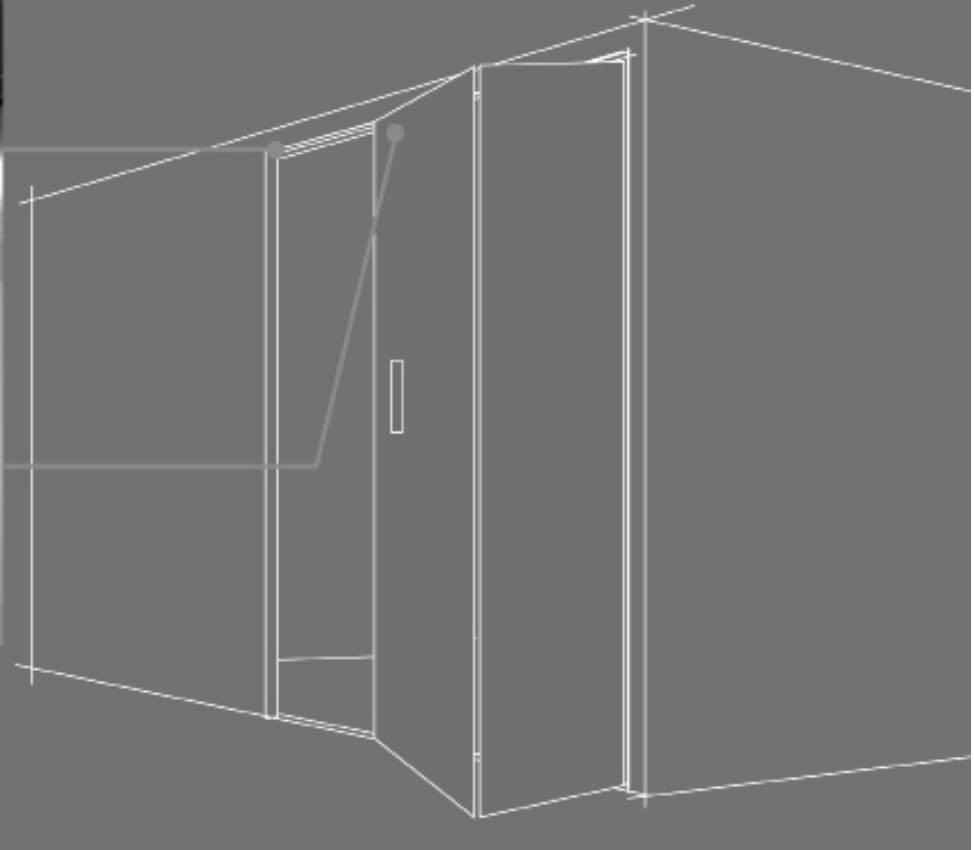

APPLICATIONS AND MAIN FEATURES

Inlay folding system for heavy doors up to 88 lbs. each.

Wider doors, up to 750mm (29 1/2).

Ideal for partitions or big closets applications.

One box with all you need to install 2 panels, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide. U21 Aluminum track for a silent glide.

Classic Line



DN 80 PL 2

CLASSIC LINE

LINEA
 SEGMENTA



SYSTEM 32



ROLLER



CARRIER TRACK



TRACK U21 AL

PART NUMBER	DESCRIPTION
+021U211	Track U21 AL 2m (6.5 ft)
+021U212	Track U21 AL 3m (9.85 ft)
+021U213	Track U21 AL 6m (19.7 ft)
+021U21-8	Track U21 AL 8 ft
+021U21-12	Track U21 AL 12 ft

MASTER PACK: 10 units

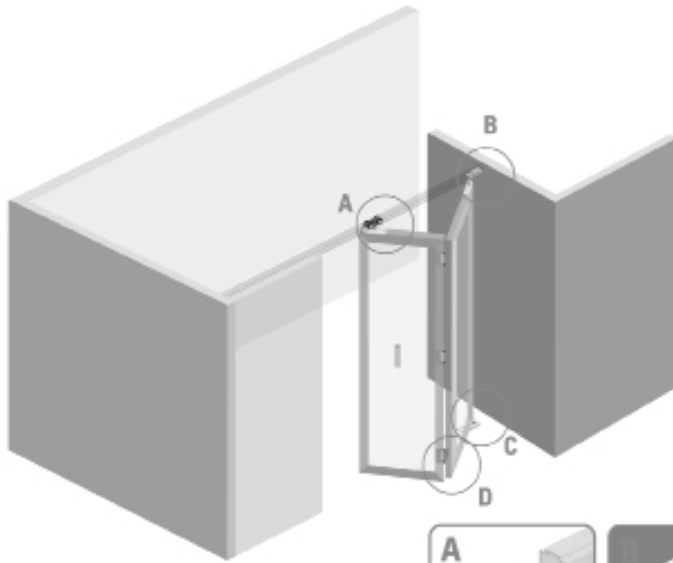


DN 80 PL 2, set for 2 panels	
PART NUMBER: 013301	
A	1 Carrier DN 80
B	1 Upper fixed base/pivot
C	1 Lower fixed base/pivot
D	3 Central hinges
E	Regulation key
F	1 Aligner
G	1 Mounting plates
H	Screws


MASTER PACK: 10 sets
 MASTER PACK SIZE: 8'25/32 x 7'13/32 x 7'11/64



CARRIER
 INSTALLATION



TRACK
 INSTALLATION



LOWER PIVOT
 INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Folding System

CLASSIC LINE

FOLDING SYSTEM

DN 80 PL 4

DUCASSE
U S A



FOLDING / INLAY
SYSTEM



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT



DOOR FRAME
MATERIAL




DOOR / TRACK
GAP

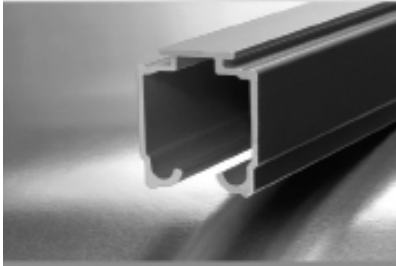

Track U21 AL



Carrier DN 80

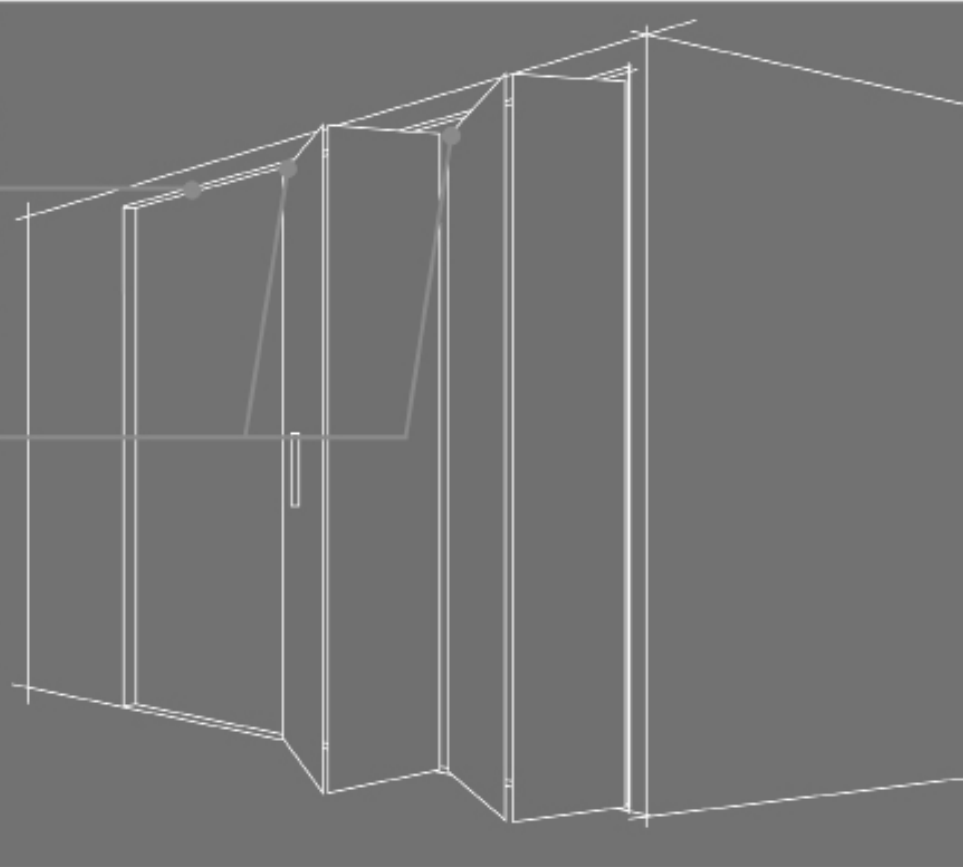

APPLICATIONS AND MAIN FEATURES

Inlay folding system for heavy doors up to 88 lbs. each. Wider doors, up to 750mm (29¹/₂).

Ideal for partitions or big closets applications. 4 panels per set. 2 sets installed on opposite sides will cover a max span of 6m (aprox 24 ft).

One box with all you need to install, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.


U21 aluminum track for a silent glide.

Classic Line



DN 80 PL 4

CLASSIC LINE
 LINEA
 SEGMENTA





CARRIER TRACK



TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL 2m (6.5 ft)
• 021U212	Track U21 AL 3m (9.85 ft)
• 021U213	Track U21 AL 6m (19.7 ft)
• 021U21-8	Track U21 AL 8 ft
• 021U21-12	Track U21 AL 12 ft

MASTER PACK: 10 units

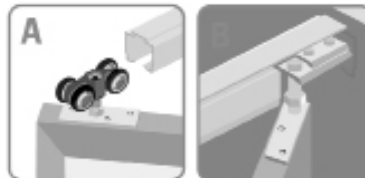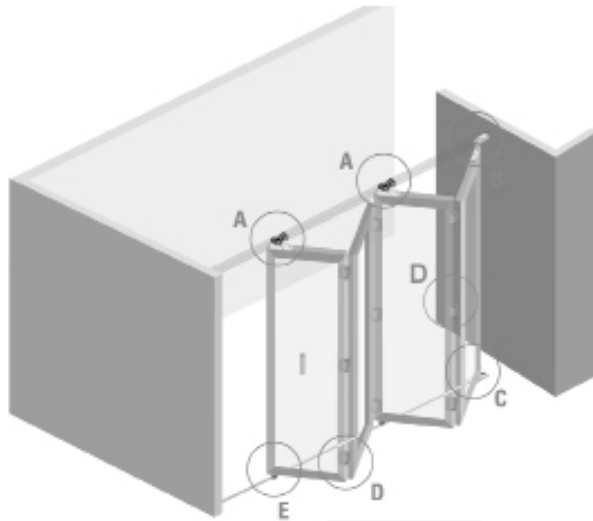


DN 80 PL 4,
 set for 4 panels


PART NUMBER: 013302

A	2 Carrier DN 80	
B	1 Upper fixed base pivot	
C	1 Lower fixed base pivot	
D	9 Central hinges	
E	2 Guides GC-16	
F	Regulation key	
G	1 Aligner	
H	2 Mounting plates	
I	Screws	


MASTER PACK: 10 sets
 MASTER PACK SIZE: 6'25/32 x 7'13/32 x 7'11/64



CARRIER
 INSTALLATION



TRACK
 INSTALLATION



GUIDE
 INSTALLATION

ALL DIMENSIONS ARE IN MM, CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

Maverick Hardware

Classic Line

CLASSIC LINE

TOP SLIDING

DN 80 VD Compression

DUCASSE
U S A



IN LINE / INLAY
*WITH L BRACKET
INLINE / OVERLAY

MAX DOOR
WEIGHT

DOOR
THICKNESS


MAX DOOR
WIDTH

MAX DOOR
HEIGHT

MIN DOOR
FRAME HEIGHT

DOOR FRAME
MATERIAL


DOOR / TRACK
GAP

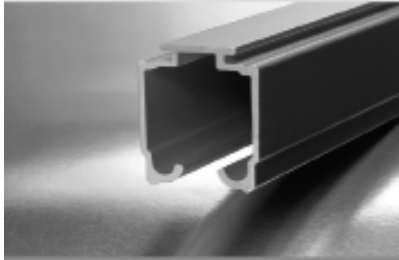

Track U21 AL



Carrier DN 80 VD

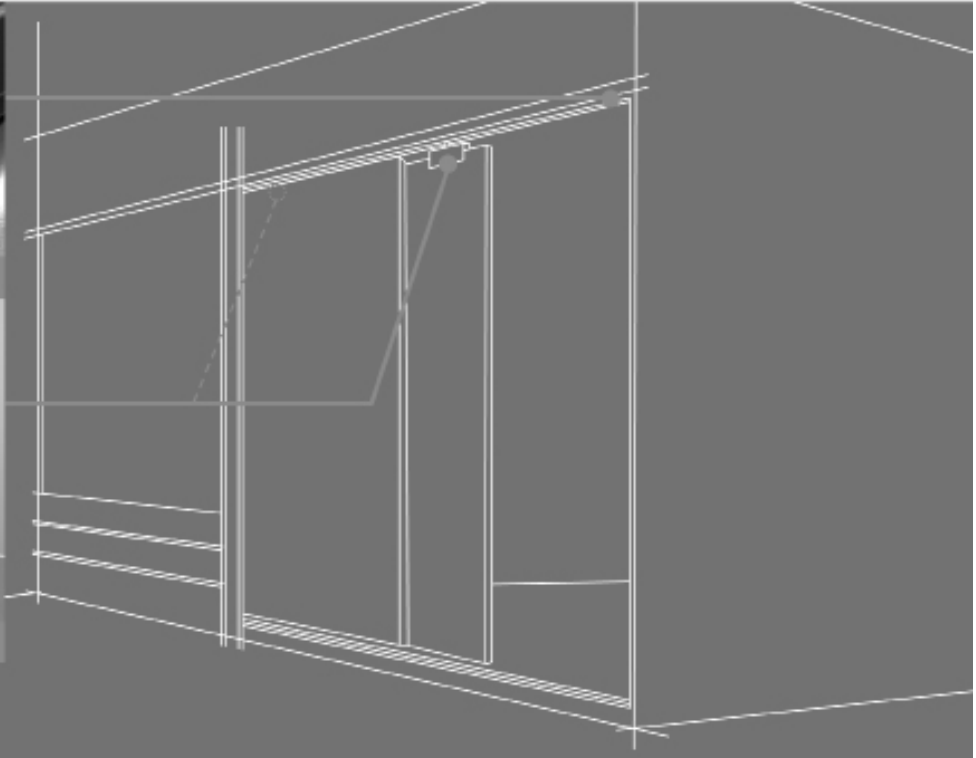

APPLICATIONS AND MAIN FEATURES

Top sliding system for GLASS doors installed inlay the opening and traveling inline.

Glass thickness 8-10mm.

Compression clamps avoid the need to bore the glass.

One box with all you need to install 1 door, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

176 lbs max weight per door.

2 fixed panels of 3m and two sliding doors of 1.2m will give you a max span of 8.4m (27.5 ft).

Stoppers with retention device installed inside the track will stop and retain the door in position.

U21 aluminum track for a silent glide.


Fascia for U21 track (accessory) will easily install with a snap providing an elegant finishing.

Track for fixed panel (accessory) to be used in combination with Track U21.

Classic Line



DN 80 VD Compression



CLASSIC LINE

LINEA SEGMENTA

CARRIER TRACK



TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL, 2m (6.5 ft)
• 021U212	Track U21 AL, 3m (9.85 ft)
• 021U213	Track U21 AL, 6m (19.7 ft)
• 021U21-8	Track U21 AL, 8 ft
• 021U21-12	Track U21 AL, 12 ft

MASTER PACK: 10 units

DN 80 VD,
set for 1 panel

PART NUMBER: 013204

A	2 Carriers DN 80 VD	
B	2 Stoppers with retention device	
C	1 Floor guide	
D	2 Compression clamps	
E	2 Mounting plates	
F	Regulation key	
G	Bolts	
H	Screws	

ACCESSORIES

FASCIA U21

PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL 120mm H, 6m (19.7 ft)
• 041U21661	Fascia U21 AL 66mm H, 2m (6.5 ft)
• 041U21662	Fascia U21 AL 66mm H, 3m (9.85 ft)
• 041U21663	Fascia U21 AL 66mm H, 6m (19.7 ft)
• 041U2166-8	Fascia U21 AL 66mm H, 8ft
• 041U2166-12	Fascia U21 AL 66mm H, 12ft

MASTER PACK: 5 units

FASCIA CLAMP





PART NUMBER	DESCRIPTION
• 041DN80G1	Fascia Clamp, AL 2m (6.5ft) for DN 80 VD compression clamp

MASTER PACK: 5 units


FIXED PANEL TRACK

PART NUMBER	DESCRIPTION
• 021FU211	Fixed Panel Track x U21 AL 2m(6.5ft)
• 021FU212	Fixed Panel Track x U21 AL 3m(9.85ft)


MASTER PACK: 5 units

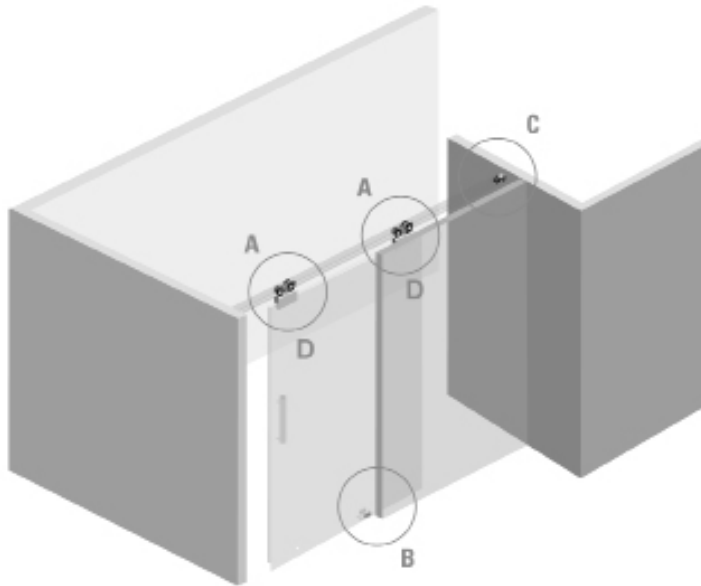

FIXED PANEL TRACK
INSTALLATION



TRACK
INSTALLATION



GUIDE
INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms
sales@ducasseusa.com | www.ducasseusa.com

Maverick Hardware

TWIN Telescopic

TWIN LINE

SYNCHRO

TWIN Telescopic



 U S A



IN LINE / INLAY SYSTEM

MAX DOOR WEIGHT
176 LBS
80 KG

DOOR THICKNESS
20-35 mm
13/16\" - 1\" 3/8


MAX DOOR WIDTH
< 2060 mm
< 81\"

MAX DOOR HEIGHT
NONE

MIN DOOR FRAME HEIGHT
N.A.

DOOR FRAME MATERIAL
WOOD OR ALUMINUM


DOOR / TRACK GAP
62 MM
2\" 15/32
10 MM
3/8\"

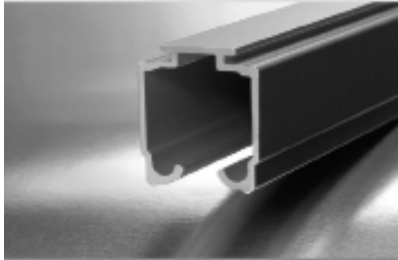

Track U21 AL



Carrier Twin TL

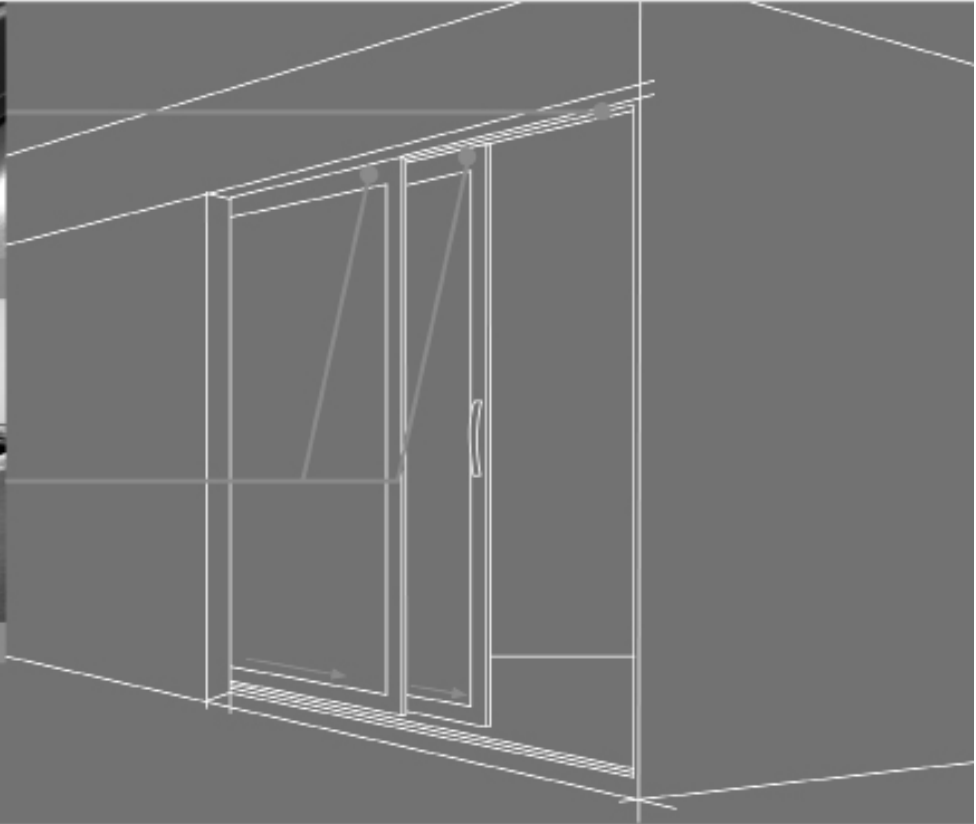

APPLICATIONS AND MAIN FEATURES

Top sliding system for wood or aluminum doors installed inlay the opening and traveling in bypass.

Doors will open, synchronized, in the same direction with only one movement.

Door width up to 2060mm (6.7 ft).

Two systems installed one at each end of the opening will provide a max span of 8.2m (26.8 ft).

One box with all you need to install 2 panels, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

176 lbs max weight per door.

Stoppers with retention device installed inside the track will stop and retain the door in position.

U21 aluminum track for a silent glide.

Fascia for U21 track (accessory) will easily install with a snap providing an elegant finishing.








TWIN Telescopic




TWIN Telescopic

TWIN LINE


LINEA SEGMENTA

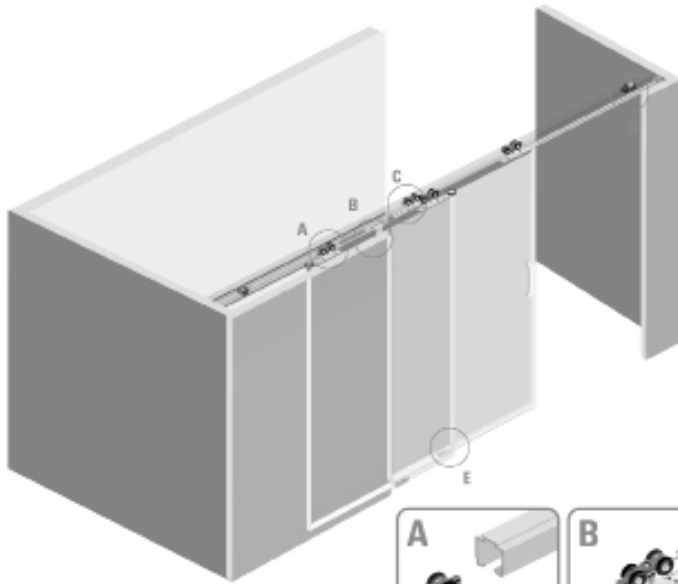

GUIDE
INSTALLATION



20 mm. > E < 25mm.
13/16" > E < 1"



25 mm. > E < 35mm.
1" > E < 1 3/8"

ALL DIMENSIONS ARE IN MM, CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

CARRIER TRACK



TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL 2m (6.5 ft)
• 021U212	Track U21 AL 3m (9.85 ft)
• 021U213	Track U21 AL 6m (19.7 ft)
• 021U21-8	Track U21 AL 8 ft
• 021U21-12	Track U21 AL 12 ft

MASTER PACK: 10 units

TWIN Telescopic,
set for 2 door

PART NUMBER: 013208

A	4 Carriers DN 80 CF	
B	2 Joint pulleys	
C	Wall cable plate	
D	2 Stoppers with retention device	
E	1 Telescopic guide	
F	1 GP 12 guide	
G	4 Telescopic guide kit with mounting plates	
H	4,2 mt - 13' 7" of cable	
I	Bolts	
J	Screws	

ACCESSORIES

FASCIA U21

PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL 120mm H, 6m (19.7 ft)
• 041U21661	Fascia U21 AL 66mm H, 2m (6.5 ft)
• 041U21662	Fascia U21 AL 66mm H, 3m (9.85 ft)
• 041U21663	Fascia U21 AL 66mm H, 6m (19.7 ft)
• 041U2166-8	Fascia U21 AL 66mm H, 8ft
• 041U2166-12	Fascia U21 AL 66mm H, 12ft

MASTER PACK: 5 units

Maverick Hardware

TWIN Line

TWIN LINE

SYNCHRO

TWIN Opposite

DUCASSE
U S A



IN LINE / INLAY
SYSTEM



MAX DOOR
WEIGHT



DOOR
THICKNESS



MAX DOOR
WIDTH



MAX DOOR
HEIGHT




MIN DOOR
FRAME HEIGHT




DOOR FRAME
MATERIAL




DOOR / TRACK
GAP

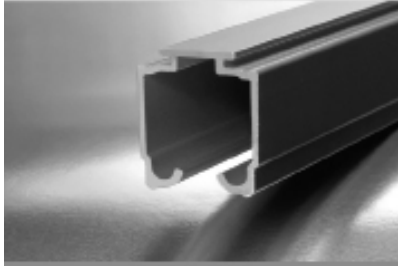

Track U21 AL

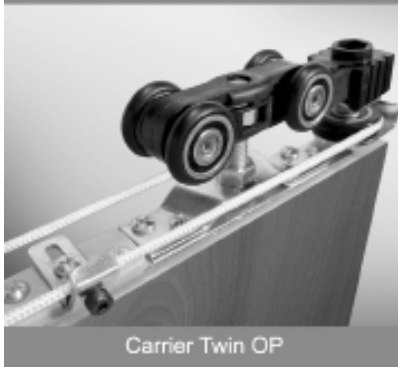

Carrier Twin OP

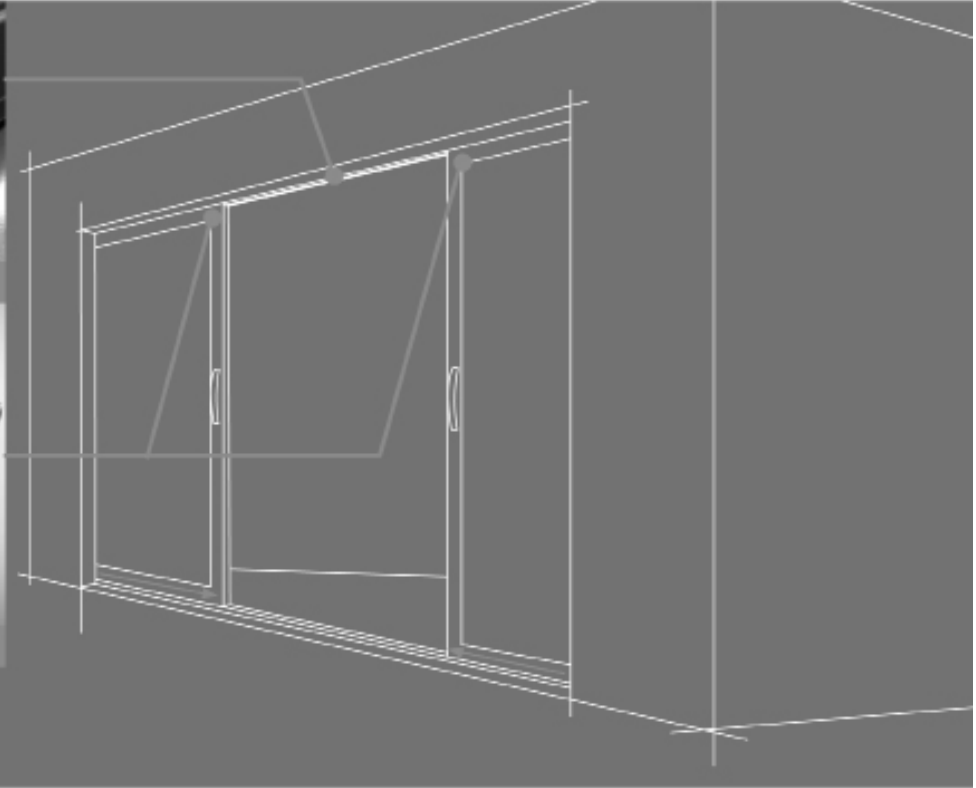

APPLICATIONS AND MAIN FEATURES

Top sliding system for wood or aluminum doors installed inlay the opening and traveling in line.

Doors will open, synchronized, in the opposite direction with only one movement.

Door width up to 1550mm (5.0 ft).

One box with all you need to install 2 panels, just order the track and you are ready to go.

Ball bearing high quality rollers for a silent and smooth glide.

176 lbs max weight per door.

Stoppers with retention device installed inside the track will stop and retain the door in position.


U21 aluminum track for a silent glide.

Fascia for U21 track (accessory) will easily install with a snap providing an elegant finishing.

TWIN Line



TWIN Opposite



TWIN LINE

LINEA SEGMENTA



CARRIER TRACK



TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL 2m (6.5 ft)
• 021U212	Track U21 AL 3m (9.85 ft)
• 021U213	Track U21 AL 6m (19.7 ft)
• 021U21-8	Track U21 AL 8 ft
• 021U21-12	Track U21 AL 12 ft

MASTER PACK: 10 units

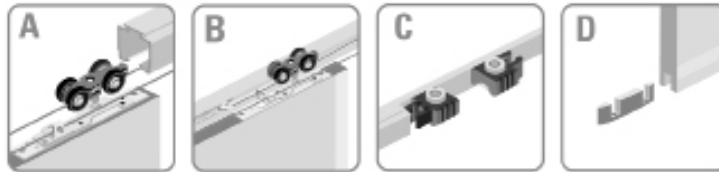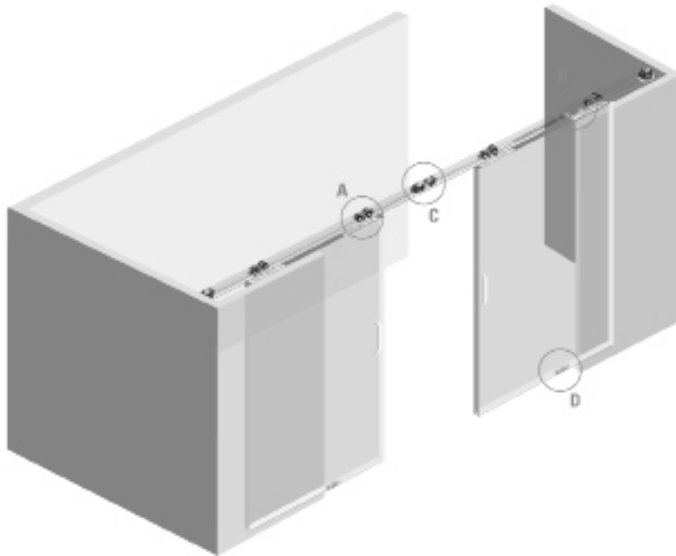


TWIN Opposite, set for 2 doors

PART NUMBER: 013307


- A** 4 Carriers DN 80 CF
- B** 1 Cable Lock Plate
- C** 2 Stoppers with retention device
- D** 2 GP 12 guide
- E** 2 Joint pulleys
- F** 4 Telescopic guide kit with mounting plates
- G** 4.2 m - 13' 7" of cable
- H** Bolts
- I** Screws



CARRIER INSTALLATION



TRACK INSTALLATION



GUIDE INSTALLATION

ALL DIMENSIONS ARE IN MM., CM., KG. USA DIMENSIONS ARE APPROXIMATE
 (*) Product tested using ANSI-BHMA protocol. For more information see the glossary of terms

ACCESSORIES

FASCIA U21

PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL 120mm H, 6m (19.7 ft)
• 041U21661	Fascia U21 AL 66mm H, 2m (6.5 ft)
• 041U21662	Fascia U21 AL 66mm H, 3m (9.85 ft)
• 041U21663	Fascia U21 AL 66mm H, 6m (19.7 ft)
• 041U2166-8	Fascia U21 AL 66mm H, 8ft
• 041U2166-12	Fascia U21 AL 66mm H, 12ft

MASTER PACK: 5 units

Maverick Hardware


Accessories



Accessories

LINEA SEGMENTA


ACCESSORIES FOR TRACK U21

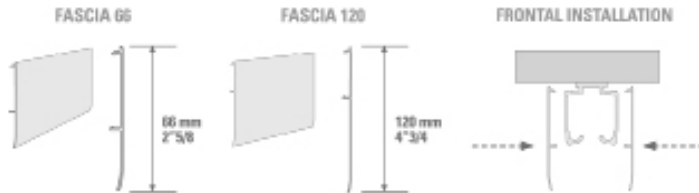


FIXED PANEL TRACK FOR U21




TOP INSTALLATION



FASCIA FOR TRACK U45

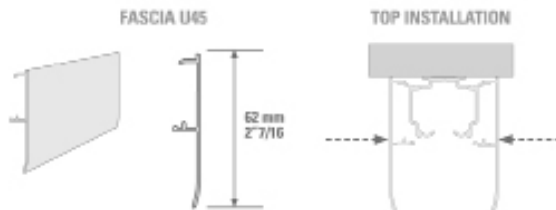

BRACKET FOR TRACK U21 AND U45

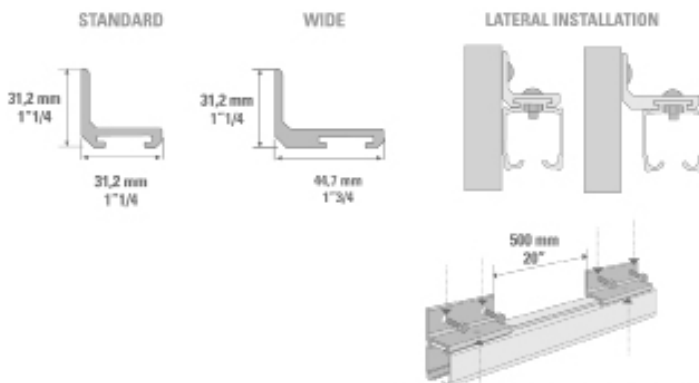

THE DISTANCE BETWEEN THE BRACKETS SHOULD BE INFERIOR TO 20". MAKE SURE TO APPLY THEM TO A STRUCTURALLY APPROPRIATE SURFACE.

FASCIA U21

PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL, 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL, 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL, 120mm H, 6m (19.7 ft)
• 041U21601	Fascia U21 AL, 66mm H, 2m (6.5 ft)
• 041U21602	Fascia U21 AL, 66mm H, 3m (9.85 ft)
• 041U21603	Fascia U21 AL, 66mm H, 6m (19.7 ft)
• 041U2160-6	Fascia U21 AL, 66mm H, 6ft
• 041U2160-12	Fascia U21 AL, 66mm H, 12ft

MASTER PACK: 5 units

FIXED PANEL TRACK

PART NUMBER	DESCRIPTION
• 021F-U211	Fixed Panel Track x U21 AL, 2m(6.5ft)
• 021F-U212	Fixed Panel Track x U21 AL, 3m(9.85ft)

MASTER PACK: 5 units

FASCIA U45

PART NUMBER	DESCRIPTION
• 041U45621	Fascia U45 AL, 62mm H, 2m (6.5 ft)
• 041U45622	Fascia U45 AL, 62mm H, 3m (9.85 ft)

MASTER PACK: 5 units

*LATERAL BRACKET FOR OVERLAY INSTALLATION

PART NUMBER	DESCRIPTION
• 023BRAU21	Bracket 31mm for Track U21 and U45
• 023BRAU21W	Bracket 44mm for Track U21 and U45


Tracks, Guides and Fascias



Tracks, Guides and Fascias



TRACK U20 D
 Use with: Ducloset Simple
 Ducloset Double

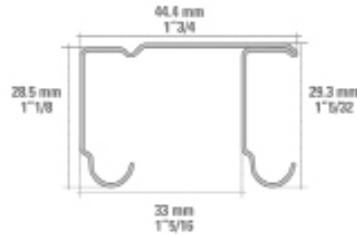


TRACK U 20 D

PART NUMBER	DESCRIPTION
• 022U2001	Track U20D Galv, Double 2m (6.5 ft)
• 022U2002	Track U20D Galv, Double 3m (9.85 ft)

MASTER PACK: 10 units

TRACK U28
 Use with: CA 4585




TRACK U 28

PART NUMBER	DESCRIPTION
• 021U281	Track U28 AL Double, 2m (6.5ft)
• 021U282	Track U28 AL Double, 3m (9.85ft)

MASTER PACK: 10 units

GUIDE TRACK G50TAD
 Use with: CD 50 TOP



GUIDE G50TAD

PART NUMBER	DESCRIPTION
• 031D50AD1	Guide G50TAD AL 2m (6.5 ft)
• 031D50AD2	Guide G50TAD AL 3m (9.85 ft)

MASTER PACK: 4 units

TRACK 50TAD
 Use with: CD 50 TOP




TRACK 50TAD

PART NUMBER	DESCRIPTION
• 02150AD1	Track 50TAD AL Double 2m (6.5 ft)
• 02150AD2	Track 50TAD AL Double 3m (9.85 ft)

MASTER PACK: 4 units

GUIDE TRACK G 50
 Use with: CD 40 CX
 CD 50 CX



GUIDE GD 50

PART NUMBER	DESCRIPTION
• 031D501	Guide GD50 AL 2m (6.5 ft)
• 031D502	Guide GD50 AL 3m (9.85 ft)

MASTER PACK: 10 units

Maverick Hardware

Tracks, Guides and Fascias

LINEA
Mobile¹

Tracks, Guides
and Fascias


DUCASSE 
U S A



OVERLAY TRACK CXD

PART NUMBER	DESCRIPTION
• 021CXD1	Track CXD AL Double 2m (6.5 ft)
• 021CXD2	Track CXD AL Double 3m (9.85 ft)

MASTER PACK: 10 units

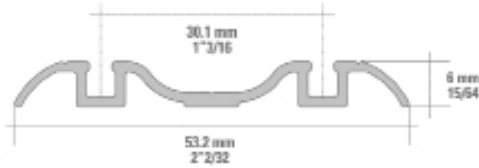

TRACK CXD


Use with: CD 40 CX
CD 50 CX



INLAY TRACK CXE

PART NUMBER	DESCRIPTION
• 021CXE1	Track CXE inset AL 2m (6.5 ft)
• 021CXE2	Track CXE inset AL 3m (9.85 ft)

MASTER PACK: 10 units



TRACK CXE


Use with: CD 40 CX
CD 50 CX
AL 1535 Wood & Glass
AL 1524
AL 1540



OVERLAY TRACK CX, SINGLE

PART NUMBER	DESCRIPTION
• 021CX1	Track CX AL, Single 2m (6.5 ft)
• 021CX2	Track CX AL, Single 3m (9.85 ft)

MASTER PACK: 10 units

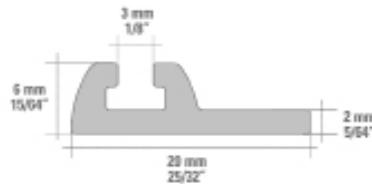

TRACK CX


Use with: CD 40 CX
CD 50 CX



TRACK PL25

PART NUMBER	DESCRIPTION
• 021PL251	Track PL25 AL 2m (6.5 ft)
• 021PL252	Track PL25 AL 3m (9.85 ft)

MASTER PACK: 10 units



TRACK PL 25


Use with: PL 2550



TRACK FCX

PART NUMBER	DESCRIPTION
• 021FCX1	Track FCX 2m (6.5 ft)
• 021FCX2	Track FCX 3m (9.85 ft)

MASTER PACK: 10 units



TRACK FCX

Use with: ALX 12
AL 1540


Tracks, Guides and Fascias



Tracks, Guides
and Fascias



FASCIA LX
 Use with: ALX 12
 AL 1540




FASCIA LX

PART NUMBER	DESCRIPTION
• 041ALX1	Fascia LX AL 2m (6.5 ft)
• 041ALX2	Fascia LX AL 3m (9.85 ft)

MASTER PACK: 10 units

TRACK D25
 Use with: D 25

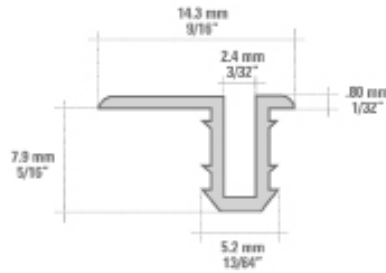

TRACK D25 PVC

PART NUMBER	DESCRIPTION
• 024D252-WT	Track D25 PVC, White 3m (9.85 ft)
• 024D252-BR	Track D25 PVC, Brown 3m (9.85 ft)
• 024D252-BL	Track D25 PVC, Black 3m (9.85 ft)
• 024D252-SV	Track D25 PVC, Silver 3m (9.85 ft)
• 024D252-BE	Track D25 PVC, Beige 3m (9.85 ft)
• 024D252-CA	Track D25 PVC, Caramel 3m (9.85 ft)

MASTER PACK: 20 units

Maverick Hardware

Tracks, Guides and Fascias

LINEA
SEGMENTA


Tracks, Guides
and Fascias



TRACK U45 AL

PART NUMBER	DESCRIPTION
• 021U451	Track U45 AL 2m (6.5 ft)
• 021U452	Track U45 AL 3m (9.85 ft)

MASTER PACK: 10 units



TRACK U 45

Use with: DN 50 CF
DN 50 LT



FASCIA U45

PART NUMBER	DESCRIPTION
• 041U45621	Fascia U45 AL 62mm H, 2m (6.5 ft)
• 041U45622	Fascia U45 AL 62mm H, 3m (9.85 ft)

MASTER PACK: 5 units



FASCIA U 45


Use with: DN 50 CF
DN 50 LT



TRACK U21 AL

PART NUMBER	DESCRIPTION
• 021U211	Track U21 AL 2m (6.5 ft)
• 021U212	Track U21 AL 3m (9.85 ft)
• 021U213	Track U21 AL 6m (19.7 ft)
• 021U21-8	Track U21 AL 8 ft
• 021U21-12	Track U21 AL 12 ft

MASTER PACK: 10 units

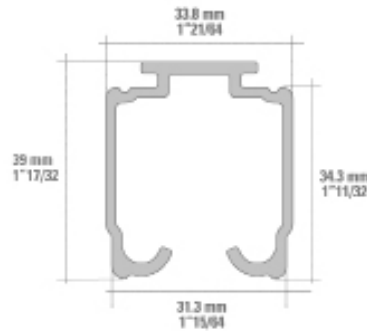

TRACK U 21


Use with: DN 80 CF
DN 80 LT
DN 80 FT
DN 80 PL2
DN 80 PL4
DN 80 VD
TWIN SYSTEMS



FASCIA U21

PART NUMBER	DESCRIPTION
• 041U211201	Fascia U21 AL 120mm H, 2m (6.5 ft)
• 041U211202	Fascia U21 AL 120mm H, 3m (9.85 ft)
• 041U211203	Fascia U21 AL 120mm H, 6m (19.7 ft)
• 041U21661	Fascia U21 AL 66mm H, 2m (6.5 ft)
• 041U21662	Fascia U21 AL 66mm H, 3m (9.85 ft)
• 041U21663	Fascia U21 AL 66mm H, 6m (19.7 ft)
• 041U2166-8	Fascia U21 AL 66mm H, 8ft
• 041U2166-12	Fascia U21 AL 66mm H, 12ft

MASTER PACK: 5 units

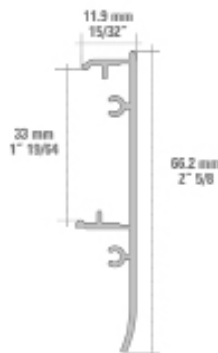

FASCIA U 21 66

Use with: DN 80 CF
DN 80 LT
DN 80 FT
DN 80 PL2
DN 80 PL4
DN 80 VD
TWIN SYSTEMS

Useful Information

Ducasse USA

Useful Information

mm converted to decimal USA and approximate fractional USA

mm	Decimal USA	Aprox Fractional USA
1	0,0394	3/64
2	0,0787	5/64
3	0,1181	1/8
4	0,1575	5/32
5	0,1969	13/64
6	0,2362	15/64
7	0,2756	9/32
8	0,3150	5/16
9	0,3543	23/64
10	0,3937	25/64
11	0,4331	7/16
12	0,4724	15/32
13	0,5118	33/64
14	0,5512	35/64
15	0,5906	19/32
16	0,6299	5/8
17	0,6693	43/64
18	0,7087	23/32
19	0,7480	3/4
20	0,7874	25/32
21	0,8268	53/64
22	0,8661	55/64
23	0,9055	29/32
24	0,9449	61/64
25	0,9843	63/64

Fractional USA converted to decimal USA and approximate mm

Fractional USA	Decimal USA	Aprox mm
1/64	0,016	0,397
1/32	0,031	0,794
3/64	0,047	1,191
1/16	0,063	1,588
5/64	0,078	1,984
3/32	0,094	2,381
7/64	0,109	2,778
1/8	0,125	3,175
9/64	0,141	3,572
5/32	0,156	3,969
11/64	0,172	4,366
3/16	0,188	4,763
13/64	0,203	5,159
7/32	0,219	5,556
15/64	0,234	5,953
1/4	0,250	6,350
17/64	0,266	6,747
9/32	0,281	7,144
19/64	0,297	7,541
5/16	0,313	7,938
21/64	0,328	8,334
11/32	0,344	8,731
23/64	0,359	9,128
3/8	0,375	9,525
25/64	0,391	9,922
13/32	0,406	10,319
27/64	0,422	10,716
7/16	0,438	11,113
29/64	0,453	11,509
15/32	0,469	11,906
31/64	0,484	12,303
1/2	0,500	12,700
33/64	0,516	13,097
17/32	0,531	13,494
35/64	0,547	13,891
9/16	0,563	14,288
37/64	0,578	14,684
19/32	0,594	15,081
39/64	0,609	15,478
5/8	0,625	15,875
41/64	0,641	16,272
21/32	0,656	16,669
43/64	0,672	17,066
11/16	0,688	17,463
45/64	0,703	17,859
23/32	0,719	18,256
47/64	0,734	18,653
3/4	0,750	19,050
49/64	0,766	19,447
25/32	0,781	19,844
51/64	0,797	20,241
13/16	0,813	20,638
53/64	0,828	21,034
27/32	0,844	21,431
55/64	0,859	21,828
7/8	0,875	22,225
57/64	0,891	22,622
29/32	0,906	23,019
59/64	0,922	23,416
15/16	0,938	23,813
61/64	0,953	24,209
31/32	0,969	24,606
63/64	0,984	25,003
1	1,000	25,400

Maverick Hardware

Glossary

Ducasse USA

Glossary



Bearing

Premium Bearing

- Steel templated bearings with outer tracks dressed in 6,6 100% virgin nylon.
- Steel tracks hardened with thermic treatment.
- 55 - 63 Hrc Hardness.
- Rust resistant chrome zinc plated.
- Polished outer track.
- Grease lubricated.

Standard Bearing

- Steel templated bearings with outer tracks dressed in 6,6 100% virgin nylon.
- 55 - 63 Hrc Hardness.
- Rust resistant chrome zinc plated.



Door travelling / Door positioning

Inline System

- One door traveling along one track for the whole length or two doors traveling in opposite directions along the same track. Example of the first case is a pocket frame door (hidden inside the walls) and an example of the second is Twin opposite. Some inline systems can be used in bypass when 2 tracks are installed in parallel.

Bypass System

- The doors travel in parallel, overlapping. Example Ducloset Simple and double.

Folding System

- The doors are joined through hinges, a carrier allows them to fold when opening the closet and unfold when closing the doors.
- Allows a full vision of the closet's inner space and save space compared to hinged door.

Overlay System

- The doors overlay the opening, hiding the track.
- Optimizes the closet's inner space.

Inlay System

- The doors inlay the closet's furniture.
- The track can be seen, so a fascia is usually recommended (available for the segmenta line products).



Door / Track Gap

- The gap is measured from the upper edge of the door, to the lower edge of the track.



Door Thickness

- Indicates the maximum or minimum door thickness or at times the acceptable range.



Maximum Door Width

- Some sliding systems require the door to be no wider than a certain size. If under this icon you find the word NONE then there is no width requirement.



Minimum Door Frame Height

- Some systems can be used with Wood or aluminum doors, in this second case a minimum height of the frame is required to allow proper installation of the system. Example the CD 40 CX requires 35mm (1" 3/8) minimum to be bored to the frame while the CD 50 CX requires 65mm (2" 9/16).



Carrier set

- Components allow for installation of 2 doors.



Carrier set

- Components allow for installation of 1 door.



System 32

- The distance between drillings is a multiple of 32 mm.



Salinity Test

- Hours that a product resists a highly corrosive environment, exposing it to a saline fog (charged with salt, high humidity and high temperatures).
- According to the ASTM-B 117-85.



ANSI-BHMA

- Our products are being constantly tested under laboratory conditions, using the ANSI-BHMA standards.
- The standard qualifies the products in grades, according to their performance:
Grade 1: The highest performance. Recommended for institutional use.
Grade 2: Recommended for general use.
Grade 3: Recommended for domestic use.
- The choice for the right product must be according to its functionality, aesthetics, safety and final use.
- For more information on the ANSI-BHMA standard, go to the American National Standards Institute INC. West 42nd St., N.Y. 10036 or to their web site www.buildershardware.com

Hettich

Maverick Hardware

By Passing Door

Top Line Grant 72-034
up to 100 lbs/door (45 kg/door)
Double track for door thickness 3/4"
(19mm), side mount, adjustable

Grant brand 7000 hardware is the finest sliding door hardware set made.




- * Carrier bolt "sits" in spherical carrier seat
- * All parts are rust resistant
- * Free rolling nylon bearings for quiet, effortless operation
- * Designed so doors cannot jump track
- * Rocker arm carriers insure constant carrier-track contact
- * Lock nut guarantees permanent positioning
- * Serrations in apron permit vertical adjustment

The carriers are the outstanding feature of the Grant 7000 set. Each has four free rolling nylon wheels mounted on pivoting rocker-arms which allow constant wheel contact with track.

Each door therefore, rides on eight wheels. Skipping or jumping is impossible. The ball and socket suspension compensates for minor header misalignment. Hangers are secured by vibration proof stop nuts. All tracks in the complete package set (option 1) are notched at one end to permit easy access of carrier after installation of track.



Technik für Möbel

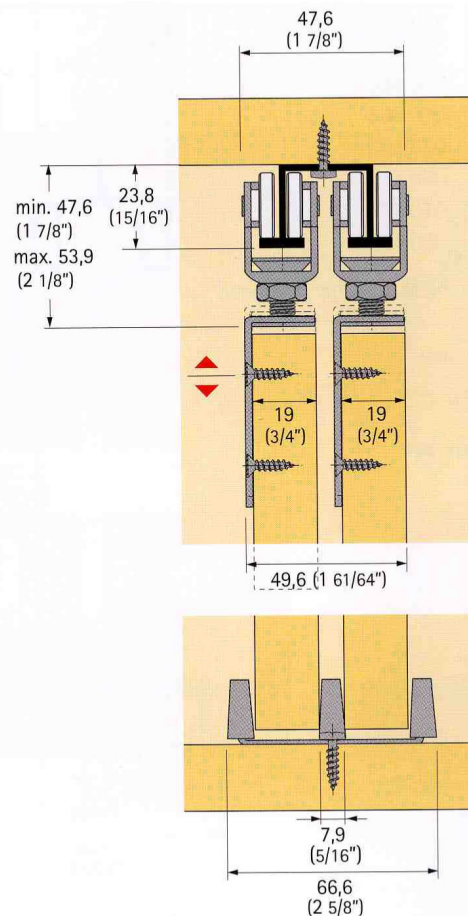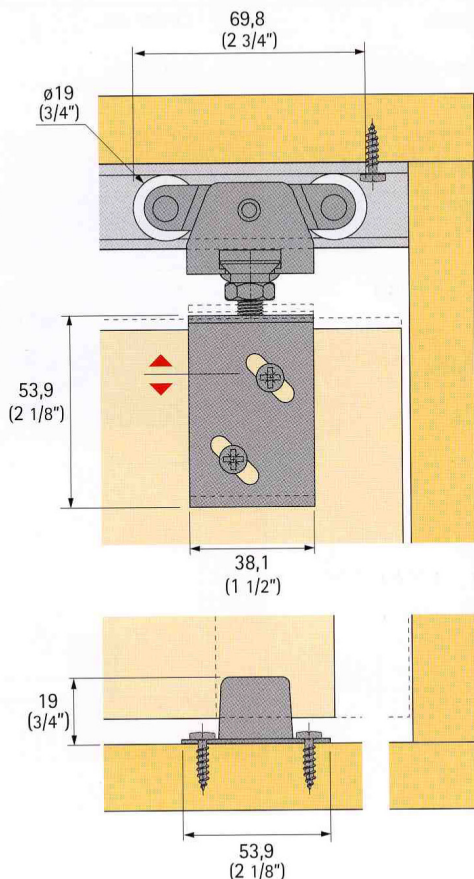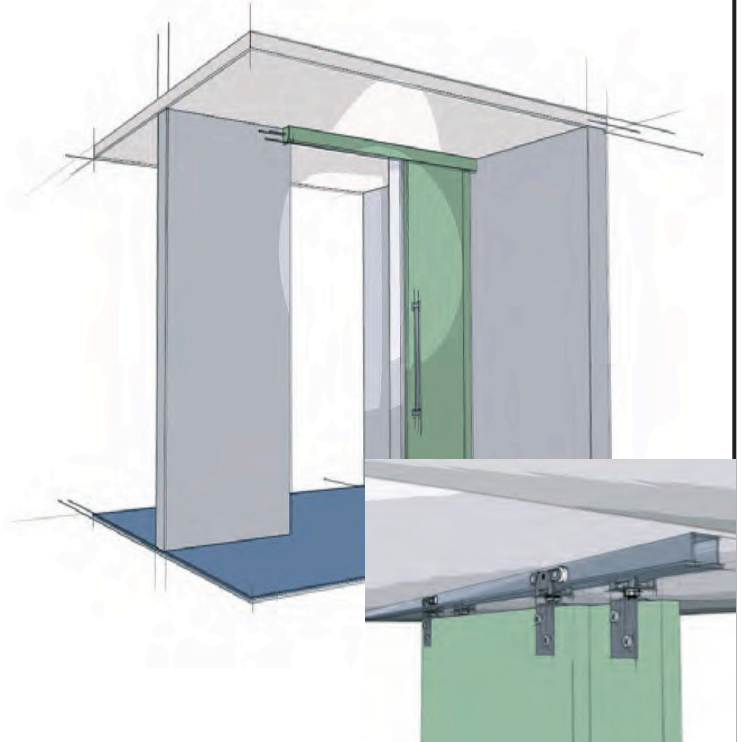

3/4" Door Thickness (side mount)

Specifications:

Mounting: Side
Adjustment: 1/4" (6.4mm) vertical
Door thickness: 3/4" (19mm)
Headroom: 1 7/8" min (47.6mm), 2 1/8" max (53.9mm)
Application: By-passing



Technik für Möbel

Double Track 7002

Length Available - (pick length)

HE7002-06 6' (1800mm)
HE7002-08 8' (2400mm)
HE7002-12 12' (3600mm)

Screws not included - recommended # 8 x 1 1/4" pan head



Carrier 7000 (no ball bearings)

HE7000

Steel, wheel nylon, 3/4" offset
Zinc plated finish
(4 needed per set)



Apron 7034

HE7034

Cold rolled steel and adjustable
Zinc plated finish
(4 needed per set)



7034
3/4"
offset

Floor Guide 116

HE116

Steel, nylon
Zinc plated finish
(1 needed per set)



Carrier 7000 (with ball bearings) (optional)

HE7000

Steel, wheel nylon
Zinc plated finish

*special order only



Bumper Stop 7014 (optional)

HE7014

Steel, track mounted, stop rubber
Zinc plated finish
(2 needed per set)



Maverick Hardware

By Passing Door

Section B-5: Ducasse & Hettich

Top Line Grant 72-118
up to 100 lbs/door (45 kg/door)
Double track for door thickness 1 1/8"
(28.6 mm), side mount, adjustable





Technik für Möbel

Grant brand 7000 hardware is the finest sliding door hardware set made.

- * Carrier bolt "sits" in spherical carrier seat
- * All parts are rust resistant
- * Free rolling nylon bearings for quiet, effortless operation
- * Designed so doors cannot jump track
- * Rocker arm carriers insure constant carrier-track contact
- * Lock nut guarantees permanent positioning
- * Serrations in apron permit vertical adjustment

The carriers are the outstanding feature of the Grant 7000 set. Each has four free rolling nylon wheels mounted on pivoting rocker-arms which allow constant wheel contact with track.

Each door therefore, rides on eight wheels. Skipping or jumping is impossible. The ball and socket suspension compensates for minor header misalignment. Hangers are secured by vibration proof stop nuts. All tracks in the complete package set (option 1) are notched at one end to permit easy access of carrier after installation of track.

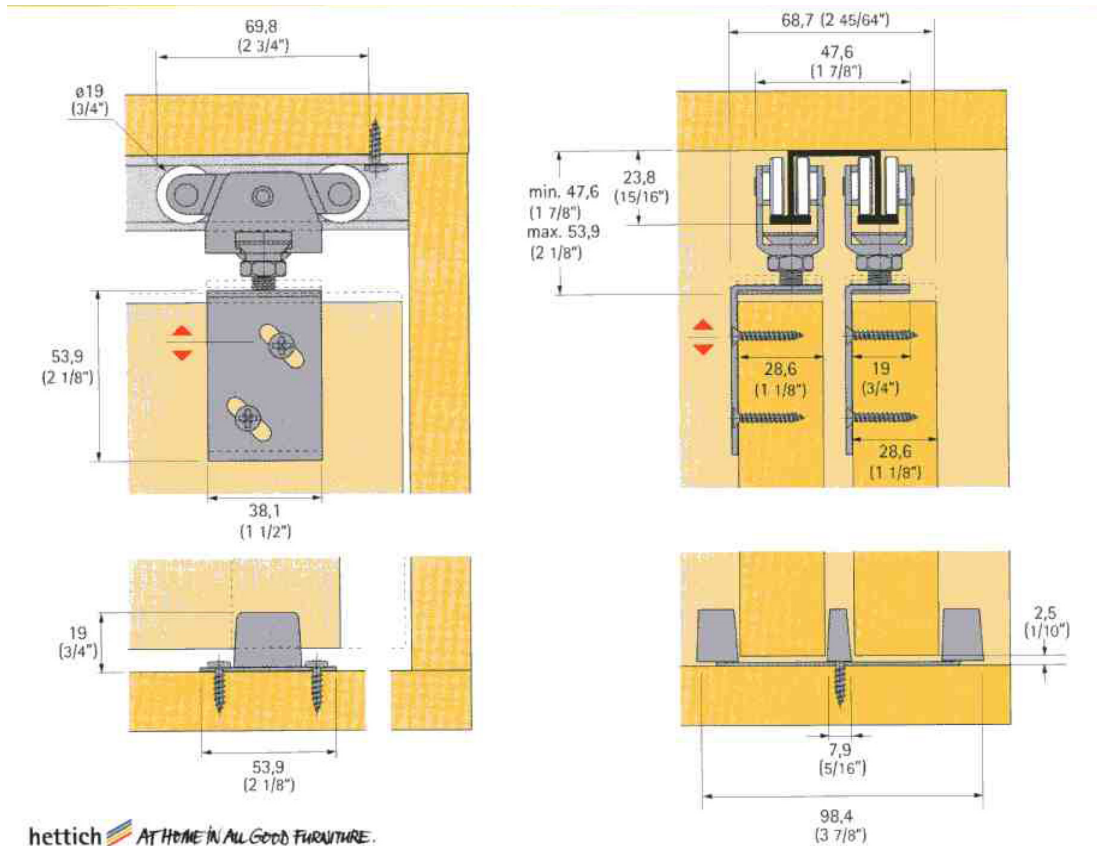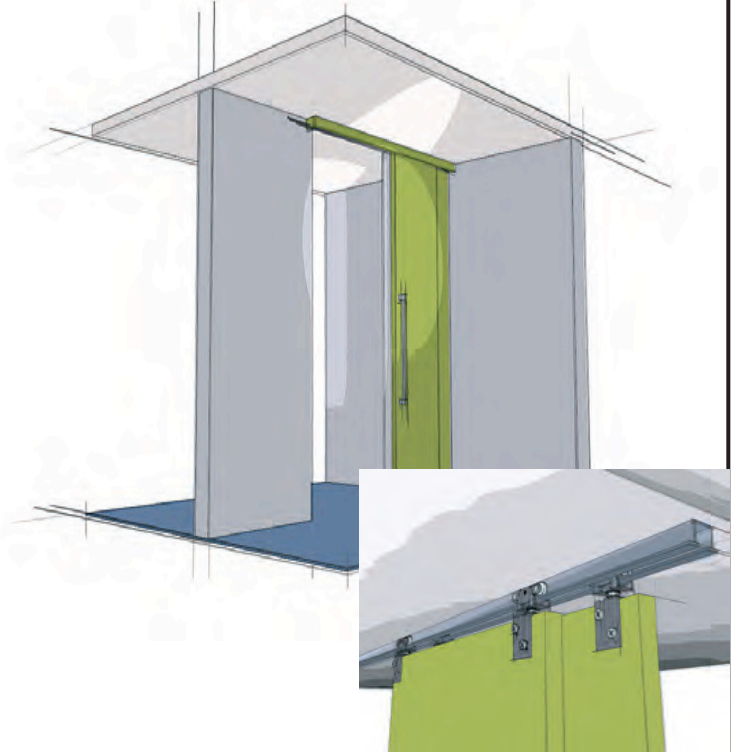

hettich AT HOME IN ALL GOOD FURNITURE.

1 1/8" Door Thickness (side mount)

Specifications:

Mounting: Side
 Adjustment: 1/4" (6.4mm) vertical
 Door thickness: 1 1/8" (28.6mm)
 Headroom: 1 7/8" min (47.6mm), 2 1/8" max (53.9mm)
 Application: By-passing



Technik für Möbel

Double Track 7002

Length Available - (pick length)

HE7002-06 6' (1800mm)
 HE7002-08 8' (2400mm)
 HE7002-12 12' (3600mm)

Screws not included - recommended # 8 x 1 1/4" pan head



Carrier 7000 (no ball bearings)

HE7000

Steel, wheel nylon, 3/4" offset
 Zinc plated finish
(4 needed per set)



Apron 7034/7038

HE7034

HE7038

Cold rolled steel and adjustable
 Zinc plated finish
(4 needed per set)



7034
3/4" offset



7138
1 1/8" offset

Floor Guide 119

HE119

Steel, nylon
 Zinc plated finish
(1 needed per set)



Carrier 7000 (with ball bearings) (optional)

HE7000

Steel, wheel nylon
 Zinc plated finish

*special order only



Bumper Stop 7014 (optional)

HE7014

Steel, track mounted, stop rubber
 Zinc plated finish
(2 needed per set)



Maverick Hardware

By Passing Door

Section B-5: Ducasse & Hettich

Top Line Grant 72-134
up to 100 lbs/door (45 kg/door)
Double track for door thickness 1 3/4"
(44.4 mm), side mount, adjustable




Technik für Möbel

Grant brand 7000 hardware is the finest sliding door hardware set made.

- * Carrier bolt "sits" in spherical carrier seat
- * All parts are rust resistant
- * Free rolling nylon bearings for quiet, effortless operation
- * Designed so doors cannot jump track
- * Rocker arm carriers insure constant carrier-track contact
- * Lock nut guarantees permanent positioning
- * Serrations in apron permit vertical adjustment

The carriers are the outstanding feature of the Grant 7000 set. Each has four free rolling nylon wheels mounted on pivoting rocker-arms which allow constant wheel contact with track.

Each door therefore, rides on eight wheels. Skipping or jumping is impossible. The ball and socket suspension compensates for minor header misalignment. Hangers are secured by vibration proof stop nuts. All tracks in the complete package set (option 1) are notched at one end to permit easy access of carrier after installation of track.

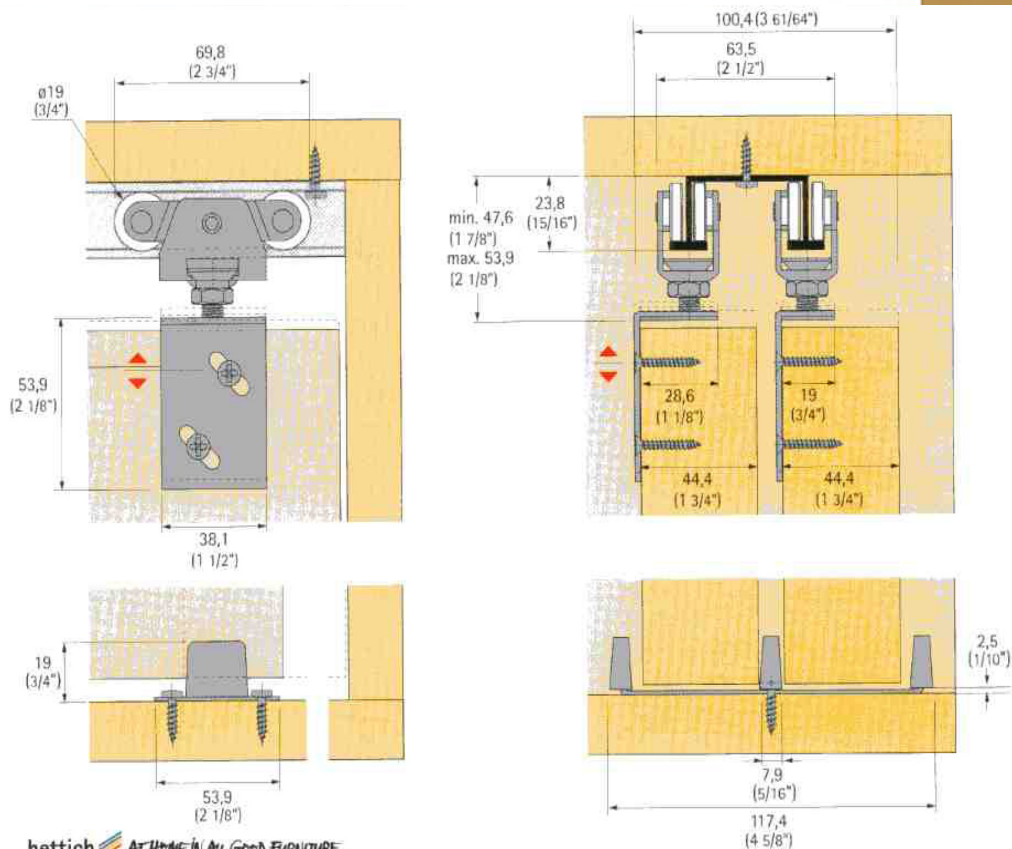

hettich AT HOME IN ALL GOOD FURNITURE.

1 3/4" Door Thickness (side mount)

Specifications:

Mounting: Side
 Adjustment: 1/4" (6.4mm) vertical
 Door thickness: 1 3/4" (44.4mm)
 Headroom: 1 7/8" min (47.6mm), 2 7/8" max (53.9mm)
 Application: By-passing



Technik für Möbel

Double Track 7002

Length Available - (pick length)

HE7002-06 6' (1800mm)

HE7002-08 8' (2400mm)

HE7002-12 12' (3600mm)

Screws not included - recommended # 8 x 1 1/4" pan head



Carrier 7000 (no ball bearings)

HE7000

Steel, wheel nylon, 3/4" offset
 Zinc plated finish
(4 needed per set)



Apron 7034/7038

HE7034

HE7038

Cold rolled steel and adjustable
 Zinc plated finish
(4 needed per set)



7034
3/4"
offset



7138
1 1/8"
offset

Floor Guide 118

HE118

Steel, nylon
 Zinc plated finish
(1 needed per set)



Carrier 7000 (with ball bearings) (optional)

HE7000

Steel, wheel nylon
 Zinc plated finish

*special order only



Bumper Stop 7014 (optional)

HE7014

Steel, track mounted, stop rubber
 Zinc plated finish
(2 needed per set)



Maverick Hardware

By Passing Door

Section B-5: Ducasse & Hettich

Top Line Grant 72-138
up to 100 lbs/door (45 kg/door)
Double track for door thickness 1 3/8"
(34.9 mm), side mount, adjustable

Grant brand 7000 hardware is the finest sliding door hardware set made.




- * Carrier bolt "sits" in spherical carrier seat
- * All parts are rust resistant
- * Free rolling nylon bearings for quiet, effortless operation
- * Designed so doors cannot jump track
- * Rocker arm carriers insure constant carrier-track contact
- * Lock nut guarantees permanent positioning
- * Serrations in apron permit vertical adjustment

The carriers are the outstanding feature of the Grant 7000 set. Each has four free rolling nylon wheels mounted on pivoting rocker-arms which allow constant wheel contact with track.

Each door therefore, rides on eight wheels. Skipping or jumping is impossible. The ball and socket suspension compensates for minor header misalignment. Hangers are secured by vibration proof stop nuts. All tracks in the complete package set (option 1) are notched at one end to permit easy access of carrier after installation of track.



Technik für Möbel

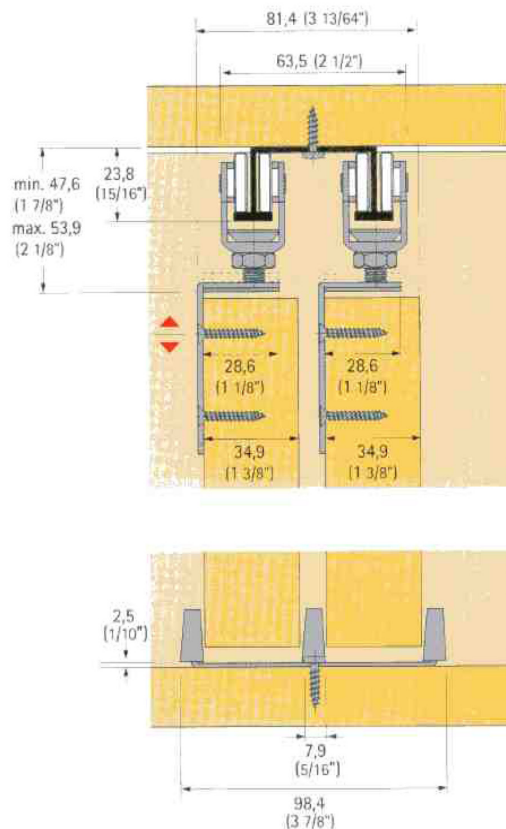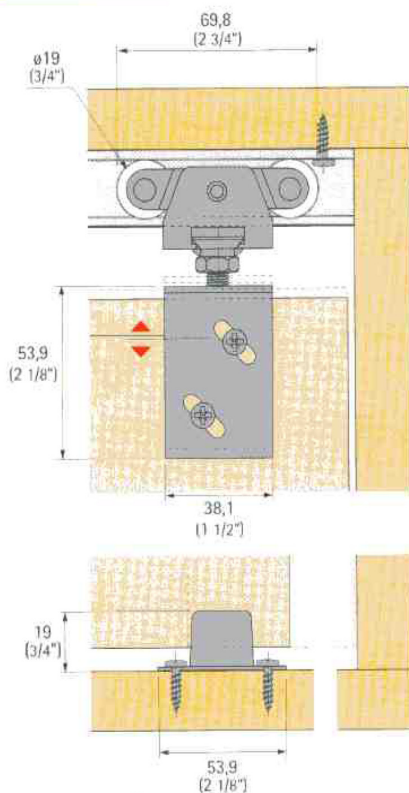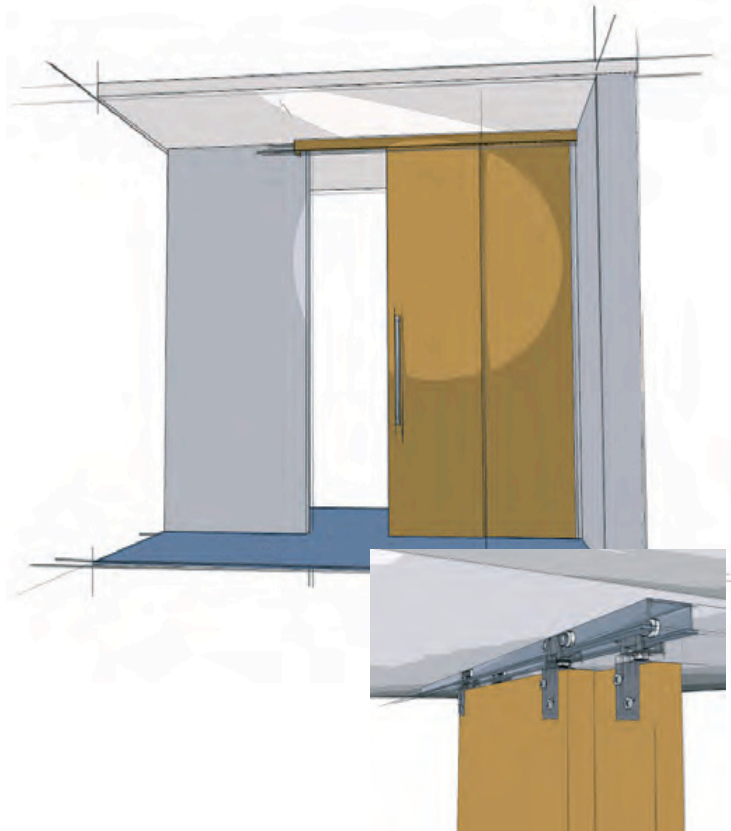

hettich *AT HOME IN ALL GOOD FURNITURE.*

1 3/8" Door Thickness (side mount)

Specifications:

Mounting: Side
 Adjustment: 1/4" (6.4mm) vertical
 Door thickness: 1 1/8" (34.9mm)
 Headroom: 1 7/8" min (47.6mm), 2 1/8" max (53.9mm)
 Application: By-passing



Technik für Möbel

Double Track 7002

Length Available - (pick length)

HE7002-06 6' (1800mm)
 HE7002-08 8' (2400mm)
 HE7002-12 12' (3600mm)

Screws not included - recommended # 8 x 1 1/4" pan head



Carrier 7000 (no ball bearings)

HE7000

Steel, wheel nylon, 3/4" offset
 Zinc plated finish
(4 needed per set)



Apron 7038

HE7038

Cold rolled steel and adjustable
 Zinc plated finish
(4 needed per set)



7138
 1 1/8" offset

Floor Guide 117

HE117

Steel, nylon
 Zinc plated finish
(1 needed per set)



Carrier 7000 (with ball bearings) (optional)

HE7000

Steel, wheel nylon
 Zinc plated finish

*special order only



Bumper Stop 7014 (optional)

HE7014

Steel, track mounted, stop rubber
 Zinc plated finish
(2 needed per set)



Maverick Hardware

By Passing Door

Section B-5: Ducasse & Hettich

Top Line Grant 72-222
up to 100 lbs/door (45 kg/door)
Double track for door thickness 3/4"
(19 mm), top mount, adjustable

Grant brand 7000 hardware is the finest sliding door hardware set made.



- * Carrier bolt "sits" in spherical carrier seat
- * All parts are rust resistant
- * Free rolling nylon bearings for quiet, effortless operation
- * Designed so doors cannot jump track
- * Rocker arm carriers insure constant carrier-track contact
- * Lock nut guarantees permanent positioning
- * Serrations in apron permit vertical adjustment

The carriers are the outstanding feature of the Grant 7000 set. Each has four free rolling nylon wheels mounted on pivoting rocker-arms which allow constant wheel contact with track.

Each door therefore, rides on eight wheels. Skipping or jumping is impossible. The ball and socket suspension compensates for minor header misalignment. Hangers are secured by vibration proof stop nuts. All tracks in the complete package set (option 1) are notched at one end to permit easy access of carrier after installation of track.



Technik für Möbel

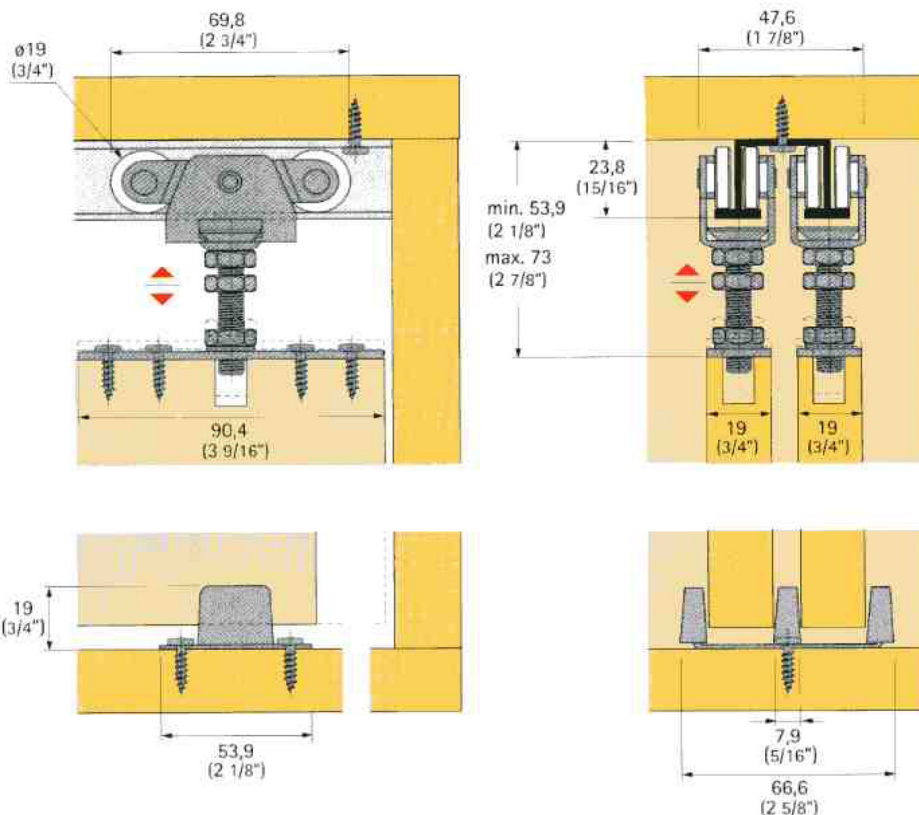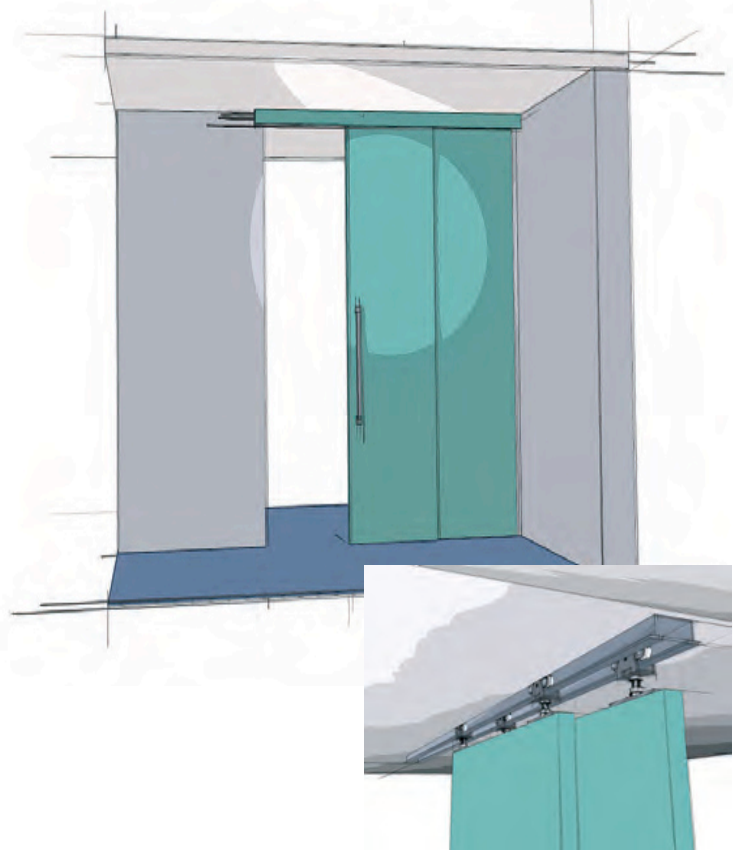

3/4" Door Thickness (top mount)

Specifications:

Mounting: Top
 Adjustment: 3/4" (19mm) vertical
 Door thickness: 3/4" (19mm)
 Headroom: 2 1/8" min (53.9mm), 2 7/8" max (73mm)
 Application: By-passing



Technik für Möbel

Double Track 7002

Length Available - (pick length)

HE7002-06 6' (1800mm)
 HE7002-08 8' (2400mm)
 HE7002-12 12' (3600mm)

Screws not included - recommended # 8 x 1 1/4" pan head



Carrier 7000 (no ball bearings)

HE7000

Steel, wheel nylon, 3/4" offset
 Zinc plated finish
(4 needed per set)



Top Plate 7222

HE7222

With pendant bolt and adjustable
 Steel
 Zinc-plated



Floor Guide 116

HE116

Steel, nylon
 Zinc plated finish
(1 needed per set)



Carrier 7000 (with ball bearings) (optional)

HE7000

Steel, wheel nylon
 Zinc plated finish

*special order only



Bumper Stop 7014 (optional)

HE7014

Steel, track mounted, stop rubber
 Zinc plated finish
(2 needed per set)



Maverick Hardware

By Passing Door

Top Line Grant 72-223
up to 100 lbs/door (45 kg/door)
Double track for door thickness 1 3/8"
(34.9 mm), top mount, adjustable

Grant brand 7000 hardware is the finest sliding door hardware set made.






- * Carrier bolt "sits" in spherical carrier seat
- * All parts are rust resistant
- * Free rolling nylon bearings for quiet, effortless operation
- * Designed so doors cannot jump track
- * Rocker arm carriers insure constant carrier-track contact
- * Lock nut guarantees permanent positioning
- * Serrations in apron permit vertical adjustment

The carriers are the outstanding feature of the Grant 7000 set. Each has four free rolling nylon wheels mounted on pivoting rocker-arms which allow constant wheel contact with track.

Each door therefore, rides on eight wheels. Skipping or jumping is impossible. The ball and socket suspension compensates for minor header misalignment. Hangers are secured by vibration proof stop nuts. All tracks in the complete package set (option 1) are notched at one end to permit easy access of carrier after installation of track.



Technik für Möbel

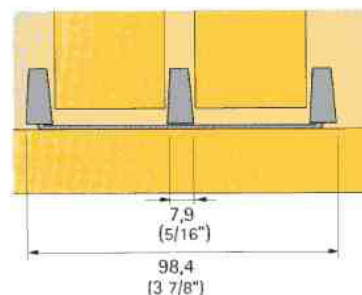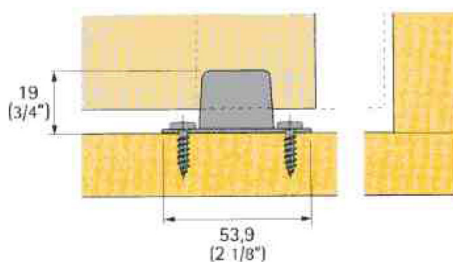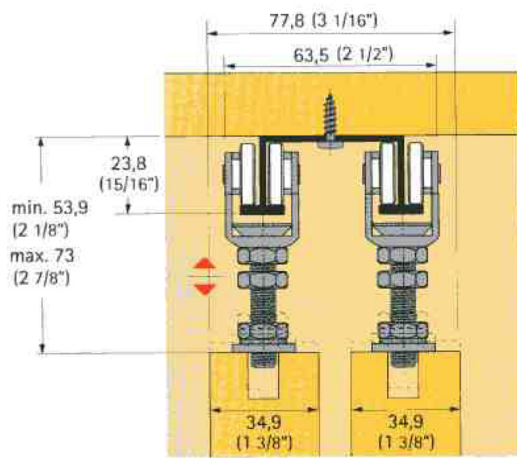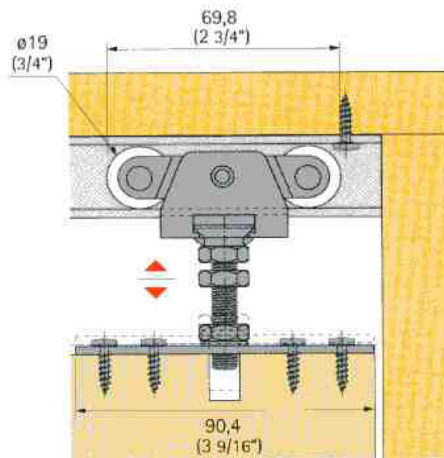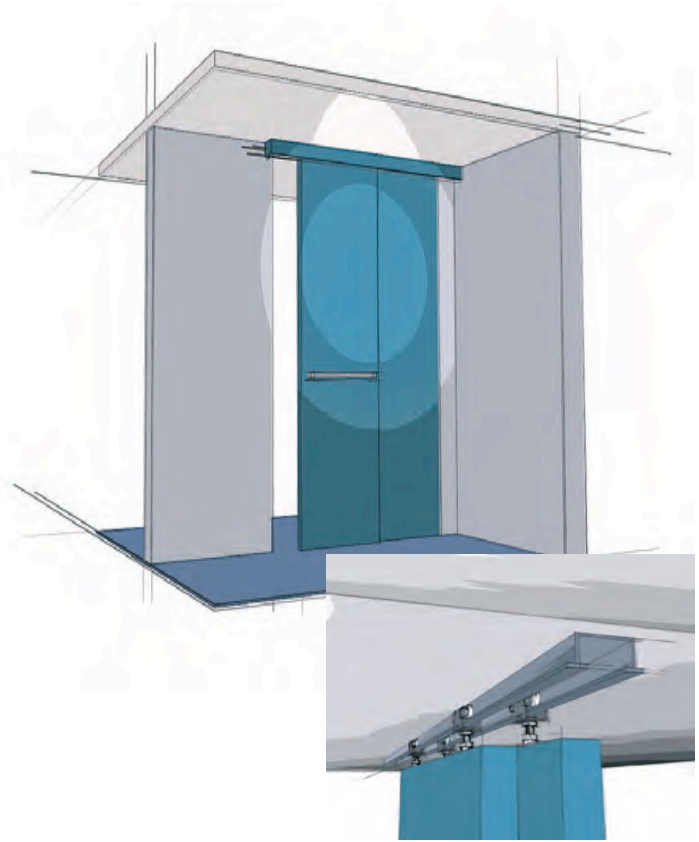

1 3/8" Door Thickness (top mount)

Specifications:

Mounting: Top
 Adjustment: 3/4" (19mm) vertical
 Door thickness: 1 3/8" (34.9mm)
 Headroom: 2 1/8" min (53.9mm), 2 7/8" max (73mm)
 Application: By-passing



Technik für Möbel

Double Track 7002

Length Available - (pick length)

HE7002-06 6' (1800mm)
 HE7002-08 8' (2400mm)
 HE7002-12 12' (3600mm)

Screws not included - recommended # 8 x 1 1/4" pan head



Carrier 7000 (no ball bearings)

HE7000

Steel, wheel nylon, 3/4" offset
 Zinc plated finish
 (4 needed per set)



Top Plate 7222

HE7222

With pendant bolt and adjustable
 Steel
 Zinc-plated



Floor Guide 117

HE117

Steel, nylon
 Zinc plated finish
 (1 needed per set)



Carrier 7000 (with ball bearings) (optional)

HE7000

Steel, wheel nylon
 Zinc plated finish

*special order only



Bumper Stop 7014 (optional)

HE7014

Steel, track mounted, stop rubber
 Zinc plated finish
 (2 needed per set)

