
# EPCO Sliding Tracks

## Maverick Hardware

		Sl	iding Doc	or Tracks an	d Glides	
Features Harden Silent o Durable Rust an Econon	6	d glides are so to wear f	-	o glide smoothly		Í
Assembly #		ninum sliding hardened fibe <u>Length</u> 4'	door track and r inserts. Install <u>Material</u> Aluminum	guide system for h ation screws includ <u>Finish</u> Clear Anodized Clear Anodized	heavier 1/4" by-passing doors. ded.	) T
Assembly # Bottom trac		ninum sliding hardened fibe	door track and r inserts. Four f		heavier 3/4" by-passing doors. The recess into bottom of door	Â

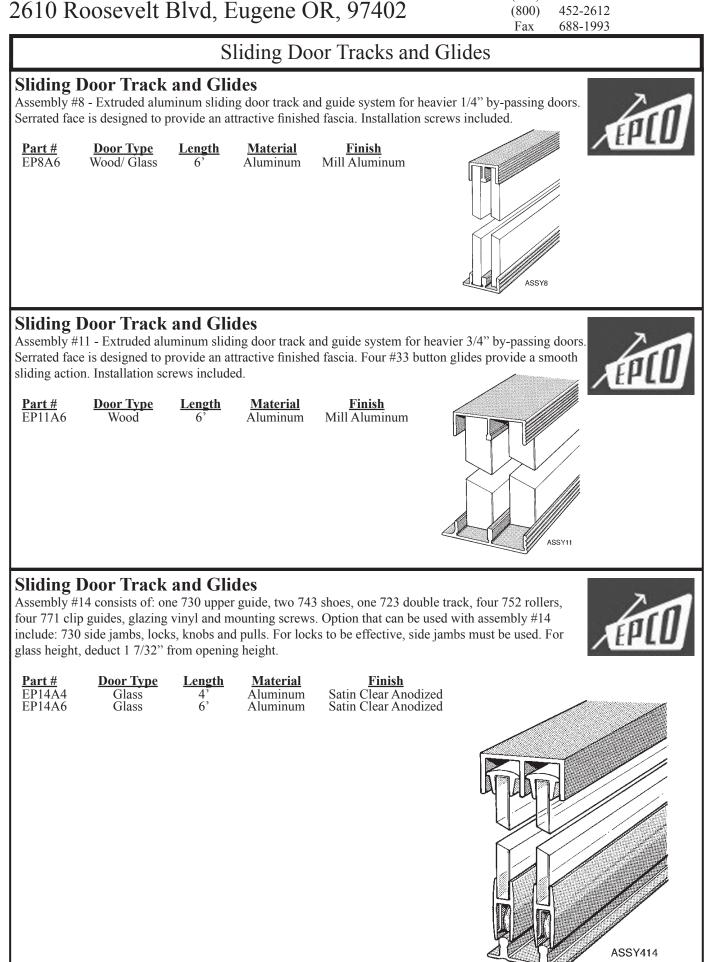

Section B-6: EPCO Sliding Tracks

(541)

688-1878

#### 3

## Maverick Hardware

### Sliding Door Tracks and Glides

#### **Sliding Door Track and Glides**

**Door Type** 

Glass

Glass


Assembly #16 consists of: one 732 upper guide, two 743 shoes, one 723 double track, one 710-A track base, four 752 rollers, four 771 clip guides, glazing vinyl and mounting screws. Option that can be used with assembly #16 include: 730 side jambs, locks, knobs and pulls. For locks to be effective, side jambs must be used. For glass height, deduct 1 7/16" from opening height.



Part #	
EP16A4	
EP16A6	
EFIOA0	

<u>Length</u> 4' 6'

<u>gth</u> <u>Material</u> Aluminum Aluminum <u>Finish</u> Satin Clear Anodized Satin Clear Anodized



Section B-6: EPCO Sliding Tracks